

Features

- Low insertion loss
- High Attenuation
- Compact Size
- N-Connector


Descriptions

N-connector cavity combline bandpass filter developed for XXX applications.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency	MHz	2350
Passband Frequency Range	MHz	7 (2346.5 ~ 2353.5) min
Insertion Loss in Passband	dB	1.5 max (1.0 TYP)
Return Loss (VSWR) in Passband	dB	1.5:1 max
Attenuation at Reject Band	dB	20min @ 2340 MHz, 20 min @ 2360 MHz
In/Out Impedance	Ohm	50
Input Average Power	Watt	15
Operating Temperature	°C	-
Humidity	%	-
Dimensions	inch	5.8 x 2.5 x 1.8 (L x W x H)

Mechanical Drawing

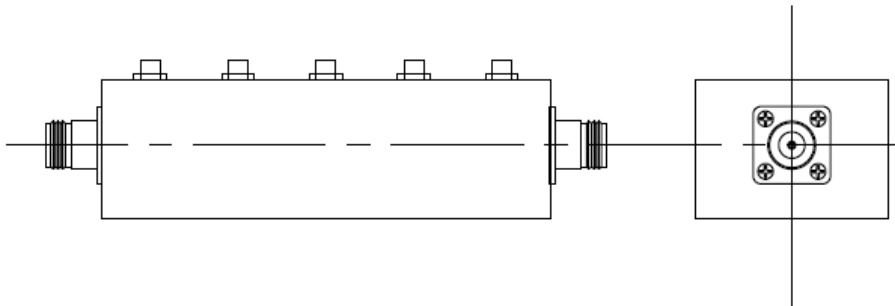

Electrical Response

