


### Electrical Specifications

No.	Parameter	Unit	Specification
1	Center Frequency	MHz	921.5
2	Frequency Range	MHz	915.5 ~ 927.5
3	Insertion Loss in BW	dB	3.85 max
4	Ripple in BW	dB	2.5 max
5	Return Loss in BW	dB	14 min
6	Attenuation	dBc	29 min @ 907 MHz
			26 min @ 931 MHz
			31 min @ 932 MHz
			26 min @ 933 ~ 2000 MHz
7	Input Power	Watts	10 CW max.
8	In/Out Impedance	Ohm	50
9	Operating Temp. Range	°C	-40 ~ +85
10	Storage Temp. Range	°C	-55 ~ +125
11	RoHS	-	Yes

### Dimensions (Unit: mm)

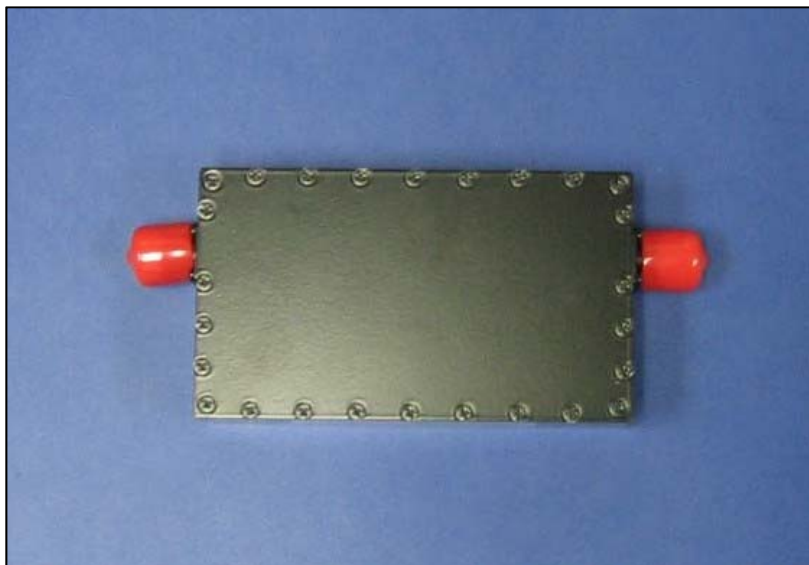

**123 x 71 x 30**



Plots:

