


### Electrical Specification

No.	Parameter	Unit	Specification
1	Center Frequency	MHz	2642.5
2	Frequency Range	MHz	2612.5 ~ 2672.5
3	Insertion Loss in BW	dB	1.4 max
4	Ripple in BW	dB	0.2 max
5	Return Loss (VSWR) in BW	dB	20 min
6	Delay Time	nS	14.5± 0.2
7	Coupling Value	dB	30±0.5
			10.6±0.5
			30±0.5
8	REV. Coupling Value	dB	30±1.0
9	Power Handling	Watts	150 max
10	In/Out Impedance	Ohm	50
11	Operating Temp. Range	°C	-10 ~ +90
12	Relative Humidity	%	5 ~ 95

### Dimension (Unit: mm)



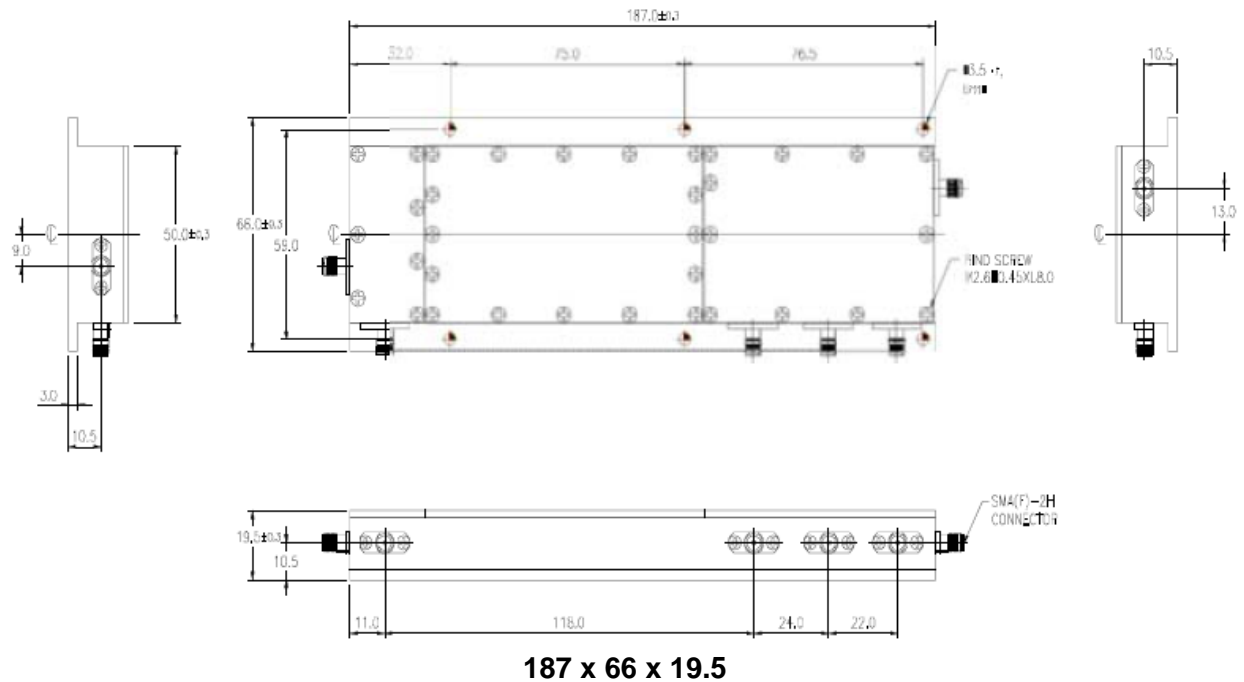

**Plots**

