

Features

- Low Insertion Loss
- High Attenuation
- High Power Handling
- Compact Size


Descriptions

N connector mount cavity bandpass filter.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency (Fc)	MHz	3338.5
Passband Frequency Range	MHz	3335.5 ~ 3341.5
Insertion Loss in Passband	dB	2.3 max
Ripple in Passband	dB	1.2 max
Return Loss in Passband	dB	15.0 min
Attenuation	dB	40 min @ 3333.9 & 3343.1 MHz
Group Delay	ns	300 max @ 3335.7 & 3341.3 MHz
In / Out Impedance	Ohms	50
Power Handling	W	10 max
Dimensions	mm	212 x 114 x 56 (L x W x H)
RoHS	-	Compliant
Relative Humidity	%	0 ~ +55
Connectors	-	N-female

Mechanical Dimensions

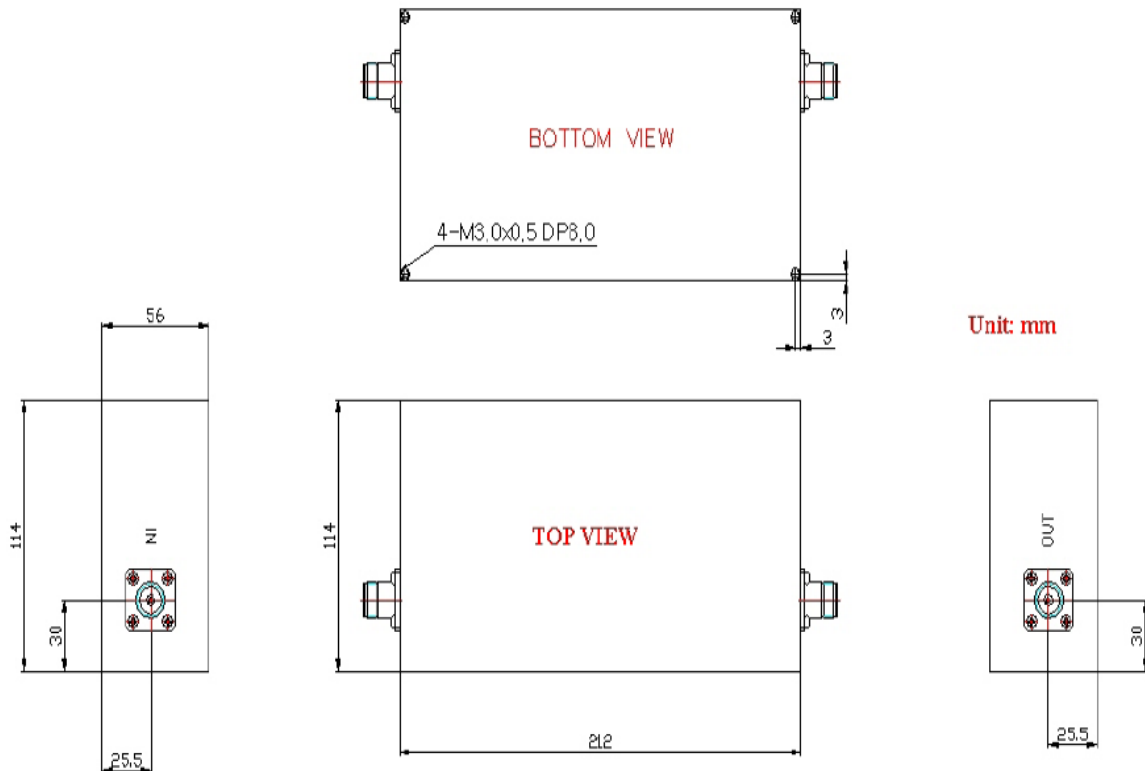

Electrical Response

