

Features

- Low Insertion Loss
- High Attenuation
- High Power Handling
- Compact Size


Descriptions

N connector mount cavity bandpass filter.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency (Fc)	MHz	5673.75
Passband Frequency Range	MHz	5621.25 ~ 5726.25
Insertion Loss in Passband	dB	1.5 max
Attenuation	dB	30 min @ 5572.5 ~ 5470 MHz
In / Out Impedance	Ohms	50
Operating Temperature Range	°C	-30 ~ +85
Dimensions	mm	77.0 x 39.0 x 28.0 (L x W x H)
RoHS	-	Compliant
Connectors	-	N-male

Mechanical Dimensions

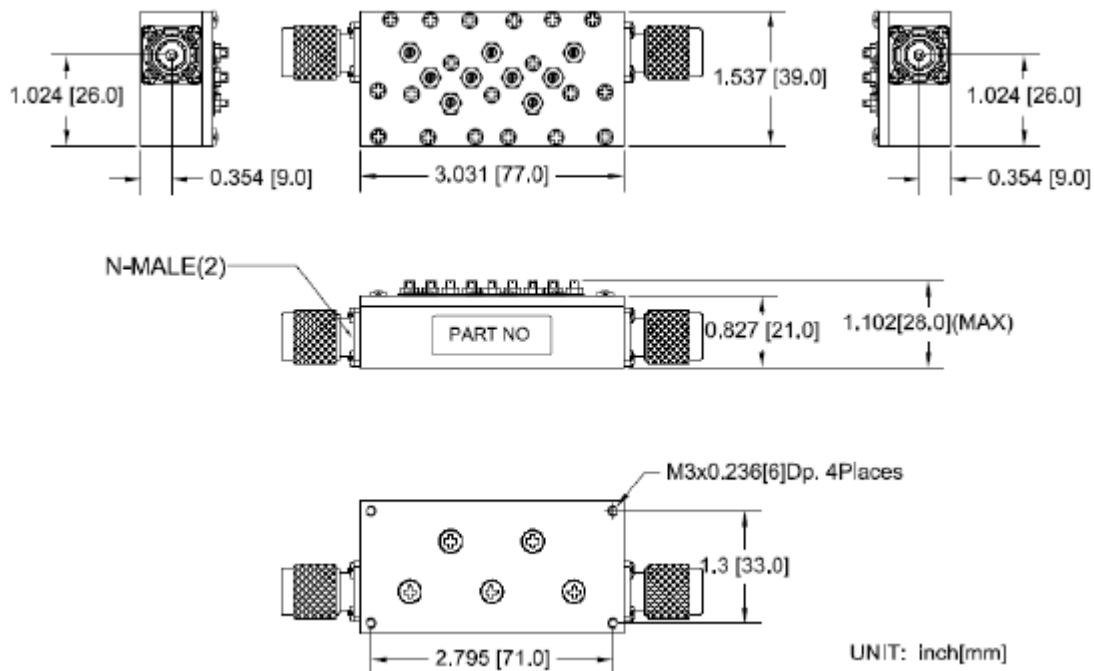

Electrical Response

