

Features

- Compact Size
- High Attenuation
- SMA connector
- LC Bandpass Filter


Descriptions

SMA connector LC Bandpass Filter developed for XXX applications.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency Fc	MHz	10
Band Width	MHz	10 min (5 ~ 15)
Insertion Loss	dB	2.0 max @ Fc
Return Loss (VSWR)	dB	1.7:1
Attenuation	dB	40 min @ DC ~ 3MHz
		40 min @ 17MHz
IN/OUT Impedance	Ω	50
Power Handling	Watt	15 max CW
Operating Temp. Range	$^{\circ}\text{C}$	-55 ~ +85
Dimensions	inch	2.38 L x 1.0 W x 0.75H

Mechanical Drawing

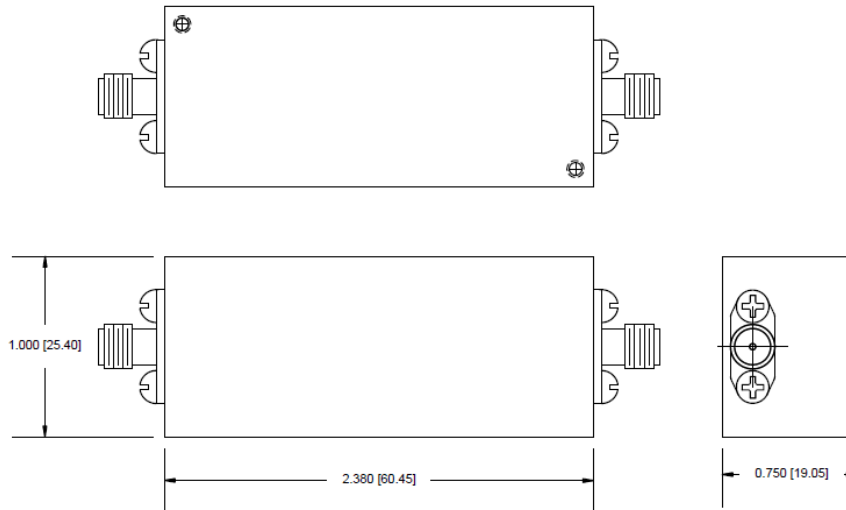

Electrical Response

