

Features

- Low Insertion Loss
- High Attenuation
- Compact Size
- Surface Mount


Descriptions

Surface mount monoblock ceramic bandpass filter.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency (Fc)	MHz	1575.42
Passband Frequency Range	MHz	1525.42 ~ 1625.42
Insertion Loss in Passband	dB	1.5 max
Ripple in Passband	dB	1.0 max
V.S.W.R.	-	2.0 max
Attenuation	dB	7 min @ 1500.42 MHz
		20 min @ 1625.42 MHz
IN/OUT Impedance	Ohm	50
Power Rating	W	1
Dimensions	mm	8.89 x 7.62 x 4.30 (L x W x H)
RoHS	-	Yes

Mechanical Drawing

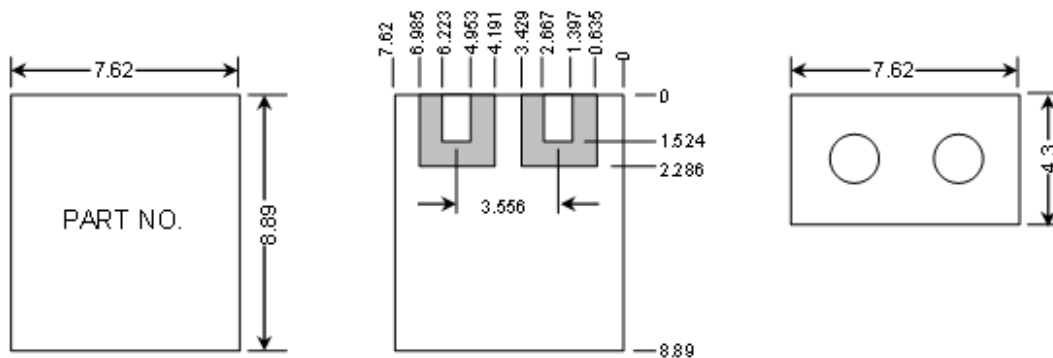

Tolerance Unless
Otherwise Specified: ± 0.15
Unit: mm