



Monolithic Block Filter Specification


Part No: MBP33R3318S12A

Date: 8/24/04

Specification:

No.	Characteristics	Unit	Typical	Minimum	Maximum
1	Frequency Range	MHz	3318	3312	3324
2	Bandwidth	MHz			12
3	Insertion Loss in BW	dB			3.0
4	Ripple in BW	dB			0.5
5	V.S.W.R.				1.5
6	Attenuation	dB	< 2500 MHz	35	
			2828 - 2840 MHz	40	
			3070 - 3082 MHz	35	
			3191 - 3203 MHz	30	
			3388 - 3400 MHz	12	
			3242 - 3254 MHz	15	
			@ 4000 MHz	35	
7	In/Out Impedance	Ohm	50		
8	Operation Temperature	C	-30 to +85		

Dimensions:

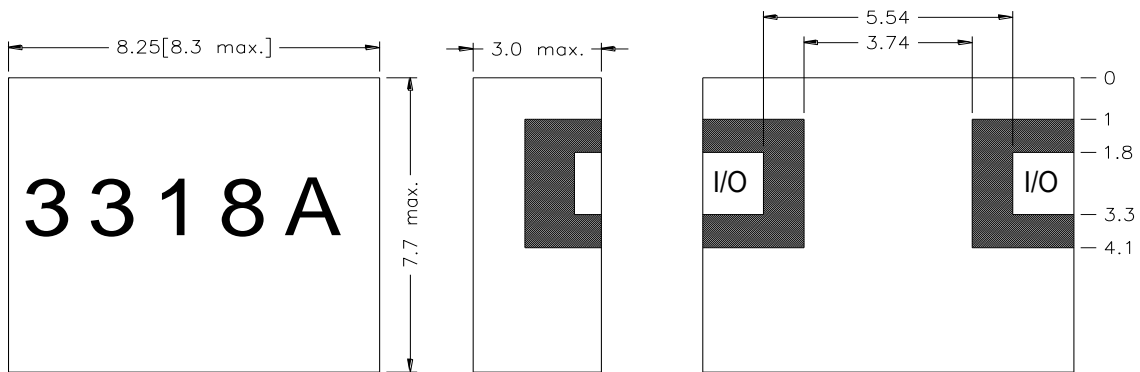

Tolerance .X ± 0.3
.XX ± 0.15

Unit : mm