



Monolithic Block Filter Specification


Part No: MBP33R3318S12A

Date: 8/24/04

Specification:

No.	Characteristics	Unit	Typical	Minimum	Maximum	
1	Frequency Range	MHz	3318	3312	3324	
2	Bandwidth	MHz			12	
3	Insertion Loss in BW	dB			3.0	
4	Ripple in BW	dB			0.5	
5	V.S.W.R.				1.5	
6	Attenuation	< 2500 MHz		35		
		2828 - 2840 MHz		40		
		3070 - 3082 MHz		35		
		3191 - 3203 MHz	dB		30	
		3388 - 3400 MHz			10	
		3242 - 3254 MHz			15	
		@ 4000 MHz			35	
7	In/Out Impedance	Ohm	50			
8	Operation Temperature	C	-30 to +85			

Dimensions:

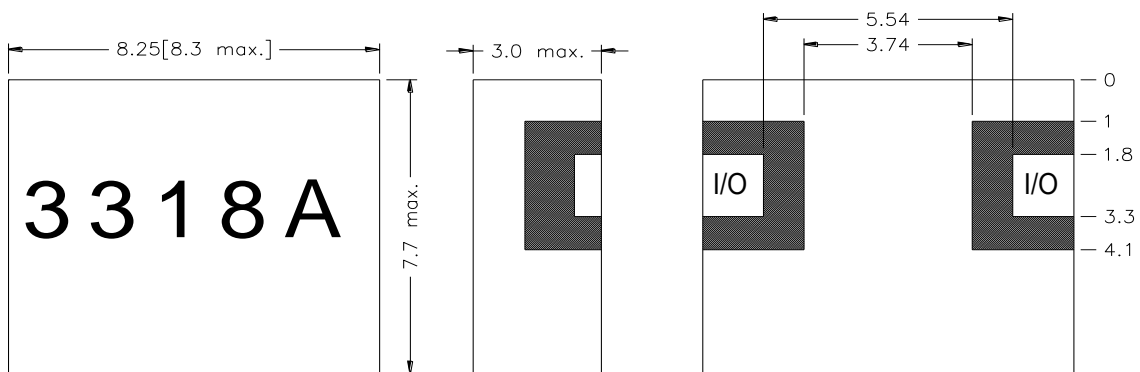

Tolerance .X ± 0.3
 .XX ± 0.15

Unit : mm