



## Monolithic Block Filter Preliminary Specification


**Part No:** MBP33R3425S50PC

**Date:** 10/28/2020

**Specification:**

No.	Characteristics	Unit	Typical	Minimum	Maximum
1	Frequency Range	MHz	3425	3400	3450
2	Bandwidth	MHz			50
3	Insertion Loss	dB	3.0		3.5
4	Ripple in BW	dB	0.5		1.0
5	V.S.W.R.		1.5		2.0
6	Attenuation @ 3500-3550 MHz	dB		25	
7	Input Power	W	2.0		
8	In/Out Impedance	Ohm	50		
9	Operation Temperature	°C	-40 to +85		

**Dimensions:**

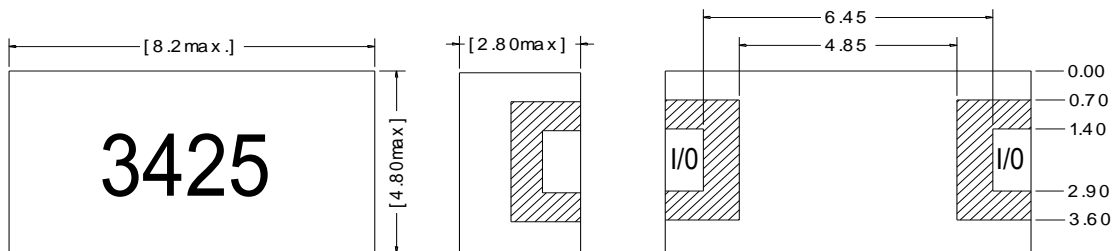

To lereuce U n less  
 0 ther ise Specified : ±0.15  
 U n it:m m