




Monolithic Block Filter Specifications

Part No: **MBP33R3575S50B**
 Date: **9/28/2004**

Specification:

No.	Characteristics	Unit	Typical	Minimum	Maximum
1	Frequency Range	MHz	3575	3550	3600
2	Bandwidth	MHz			50
3	Insertion Loss	dB			3.5
4	Ripple in BW	dB			1.0
5	V.S.W.R.				2.0
6	Attenuation @ 3475 MHz	dB		25	
7	In/Out Impedance	Ohm	50		
8	Operation Temperature	°C	-30 to +85		

Dimensions:

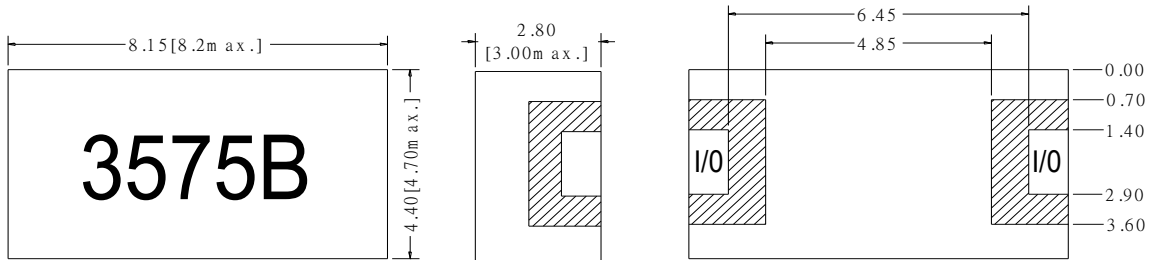

Tolerance : .x : ± 0.3
 .xx : ± 0.15

Unit: mm



Performance:

