


Electrical Specification

Item	Parameter	Unit	Specification
1	Center Frequency	MHz	4965
2	Frequency Range	MHz	4900 ~ 5030
3	Insertion Loss in BW	dB	0.3 max
4	Ripple in BW	dB	0.5 max
5	Return Loss (VSWR) in BW	dB	2.0:1 max
6	Attenuation	dB	40 min @ 2845 ~ 4190 MHz
7	Input Power	Watts	1 max
8	In/Out Impedance	Ohm	50
9	Operating Temp. Range	°C	-40 ~ +85
10	Storage Temp. Range	°C	-55 ~ +125
11	RoHS	-	Yes

Dimension (Unit: mm)



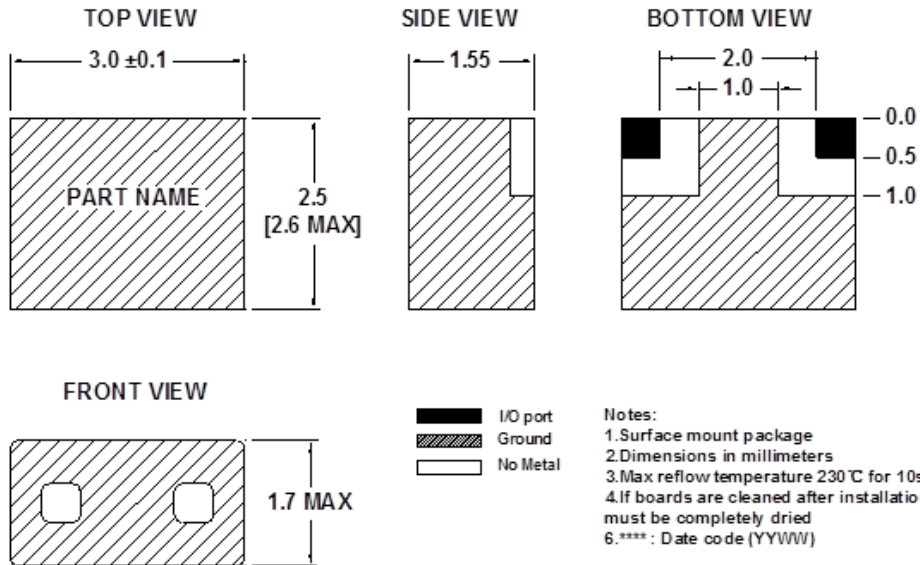

Simulations

