


### Monolithic Block Filter Sample Specification

Part No: **MBP23R5250S200PA**  
 Date: **7/16/2002**  
 Specification:

No.	Characteristics	Unit	Typical	Minimum	Maximum
1	Frequency Range	MHz	5250	5150	5350
2	Bandwidth	MHz			200
3	Insertion Loss	dB	2.5		3.0
4	Ripple in BW	dB	0.5		1.0
5	V.S.W.R.		1.5		2.0
6	Attenuation	4800 MHz		20	
		4875 MHz		15	
		5625 MHz		5	
7	Operation Temperature range	C	-30 to +85		
8	In/Out Impedance	ohm	50		

Dimensions: mm

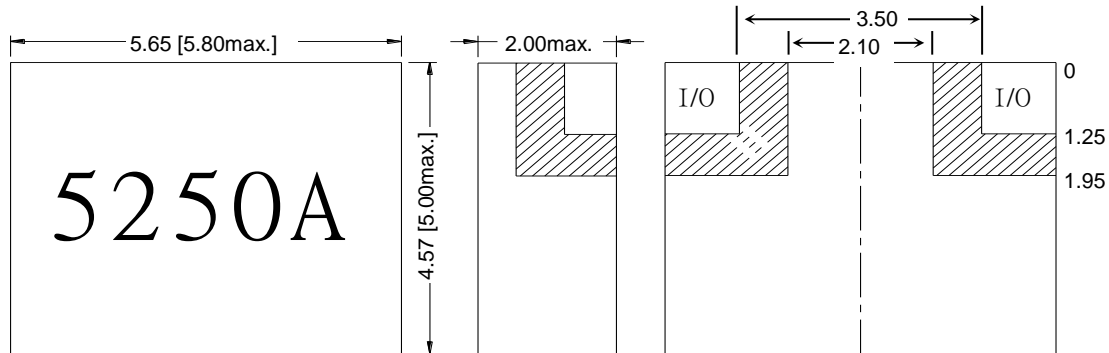

Tolerance : .X:±0.2  
 .XX:±0.15

**Performance:**

