

Features

- Low Insertion Loss
- High Attenuation
- Compact Size
- Surface Mount


Descriptions

Surface mount mono-block ceramic bandpass filter developed for U-NII-2C & 3 802.11 band applications.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency (Fc)	MHz	5697
Passband Frequency Range	MHz	5490 ~ 5850
Insertion Loss in Passband	dB	2.5 max
Ripple in Passband	dB	1.3 max
Return Loss(VSWR) in Passband	dB	10 min
Attenuation	dB	50 min @ 5150 ~ 5330MHz
Operating Input Power	Watts	1 CW max
IN/OUT Impedance	Ohm	50
Operating Temperature	°C	-40 ~ +85
Dimensions	mm	8.6 x 4.6 x 3.0 (L x W x H)
RoHS	-	Yes

Mechanical Drawing & Recommended PCB Layout

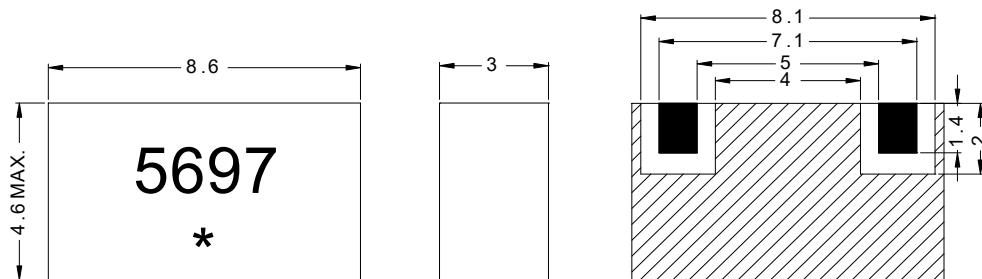


* : MONTHLY CODE

■ I/O PORT

▨ GROUND

TOLERANCE : ± 0.20

UNIT: mm

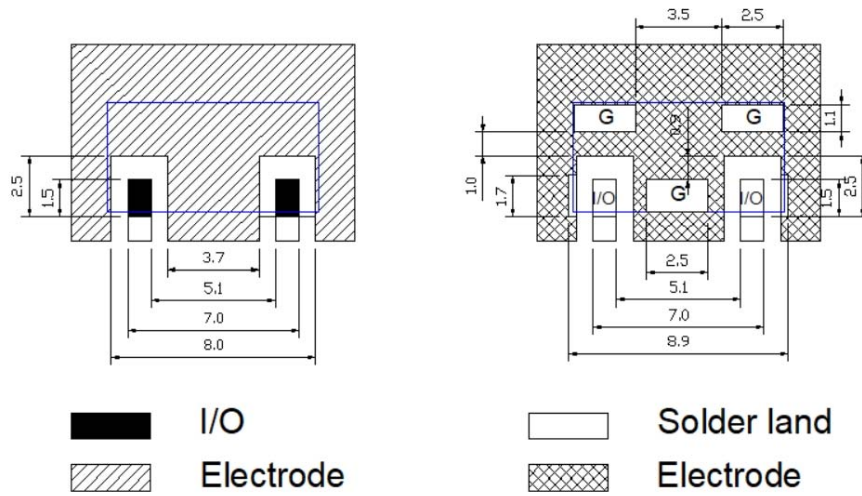

Electrical Performance

