

Features

- High Selectivity
- Low Loss
- Compact Size
- Surface Mount


Descriptions

Surface mount ceramic bandpass filter developed for L applications.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency (Fc)	MHz	1485
Passband Frequency Range	MHz	1435-1535
Insertion Loss in Passband	dB	1.5 max
Passband Ripple	dB	1.0 max
Return Loss in Passband	dB	15.0 min
Attenuation at Reject Band	dBc	40 min @ 1585 MHz
IN/OUT Impedance	Ohm	50
Input Average Power	Watt	0.5 max
Operating Temperature	°C	-40 ~ +85
Dimensions (max)	mm	26.5 x 13.5 x 9.5 (L x W x H)
RoHS	-	Yes

Mechanical Drawing

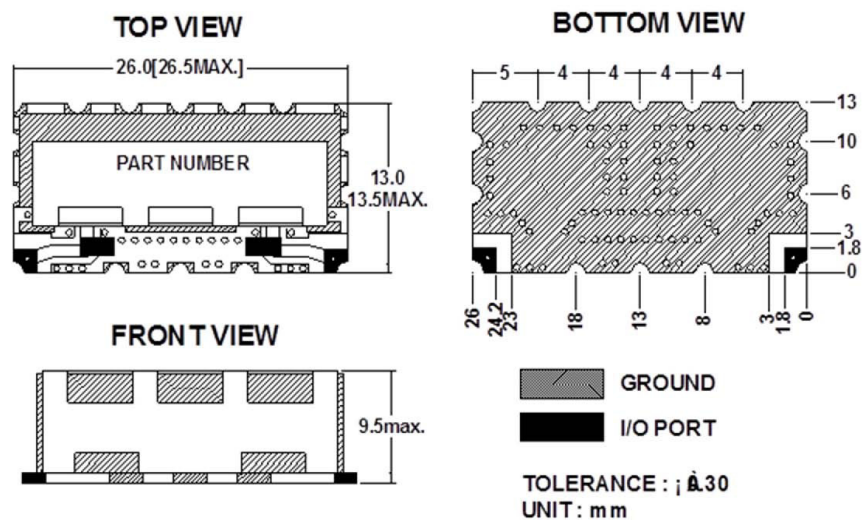

Electrical Response

