


Electrical Specifications

Item	Parameter	Unit	Specification
1	Center Frequency	MHz	1800
2	3dB Bandwidth	MHz	≥1400~2200
3	Insertion Loss	dB	≤2.0@ F _C
4	VSWR(Across 80% of PB)	dB	≤2:1
5	Attenuation	dB	≥50@DC to 0.4GHz
6		dB	≥30@0.4 to 1.1GHz
7		dB	≥10@2.5 to 3.0GHz
8		dB	≥TBD@ Above 3.0GHz
9	IN/OUT Impedance	Ω	50
10	Operating Temp. Range	°C	-40 ~ +85
11	Power Handling	mW	≥100
12	Package	-	Surface Mount

Dimensions (unit: mm)


Simulation Data

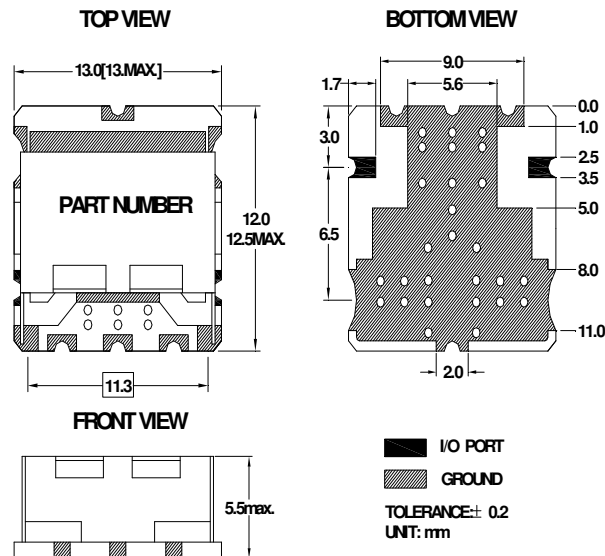