

### Features

- Low Insertion Loss
- High Attenuation
- Compact Size
- Surface Mount


### Descriptions

Surface mount ceramic bandpass filter developed for L band applications.

### Electrical Specifications

Parameter	Unit	Specification
Center Frequency(Fc)	MHz	1960
Passband Frequency Range	MHz	1950 ~ 1970
Insertion Loss	dB	2.5 max
Ripple in Passband	dB	1.0 max
Return Loss (VSWR) in Passband	dB	17 min
Attenuation	dB	45 min @ 1883.2MHz
In/Out Impedance	Ohm	50
Input Power	watt	2.0CW max
Operating Temperature	°C	-40 ~ +85
Dimensions (max)	mm	13.5 x 12.5 x 5.5 (L x W x H)

### Mechanical Drawing

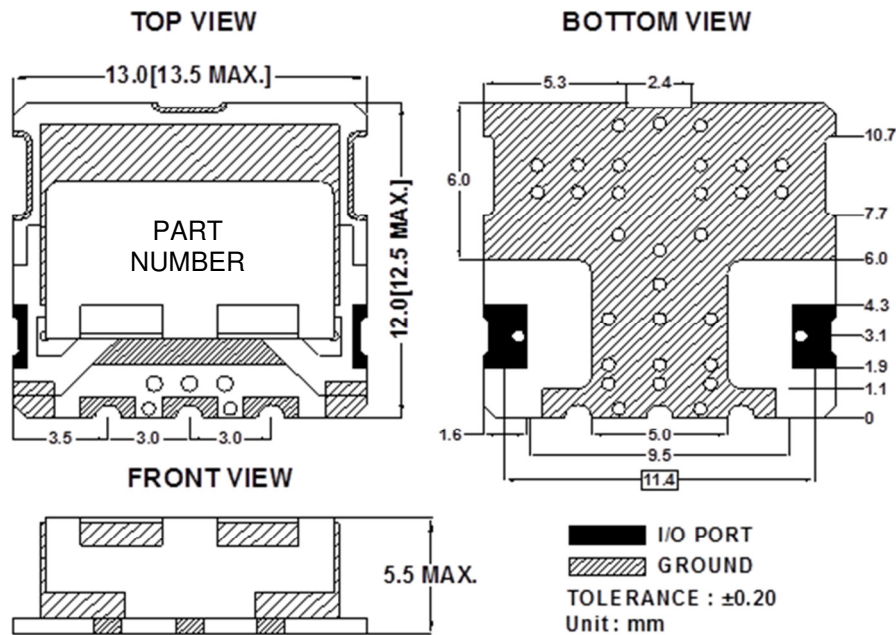

## Electrical Response

