


**Electrical Specifications**

Item	Parameter	Unit	Specification
1	Center Frequency	MHz	2200
2	3dB Bandwidth	MHz	≥1700~2700
3	Insertion Loss	dB	≤2.0@ F <sub>C</sub>
4	VSWR(Across 80% of PB)	dB	≤2:1
5	Attenuation	dB	≥50@DC to 0.5GHz
6		dB	≥30@0.5 to 1.4GHz
7		dB	≥10@3.1 to 4.6GHz
8		dB	≥TBD@ Above 4.6GHz
9	IN/OUT Impedance	Ω	50
10	Operating Temp. Range	°C	-40 ~ +85
11	Power Handling	mW	≥100
12	Package	-	Surface Mount

**Dimensions (unit: mm)**


Simulation Data

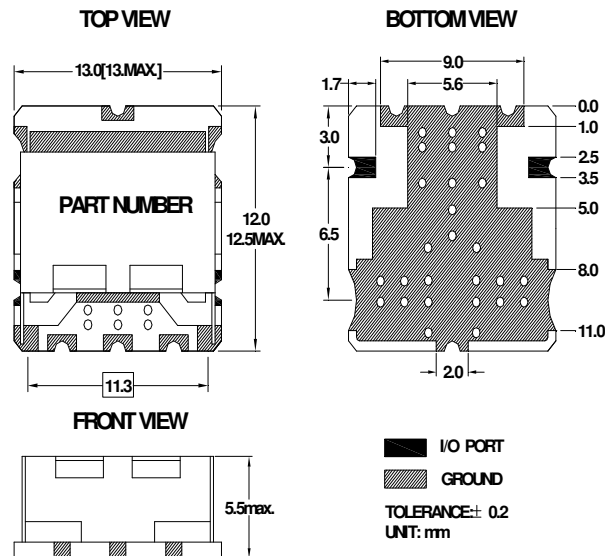