




Ceramic Filter Specification

Part No: BPM2200-16A1
 Date: 6/3/08

Specification:

No.	Characteristics	Unit	Typical	Minimum	Maximum
1	Frequency Range	MHz	2200	2192	2208
2	Bandwidth	MHz		16	
3	Insertion Loss in BW	dB			5.0
4	Ripple in BW	dB			0.58
5	Return Loss	dB		16.0	
6	Attenuation	@ 2150 MHz		65	
		@ 2250 MHz		65	
7	In/Out Impedance	ohm	50		
8	Operation Temperature	C	-20 to +65		
9	Power Handling	W	3W Max.		
10	Vibration	grams	6.06 (20 Hz to 20KHz random vibration)		

Mechanical Drawing:

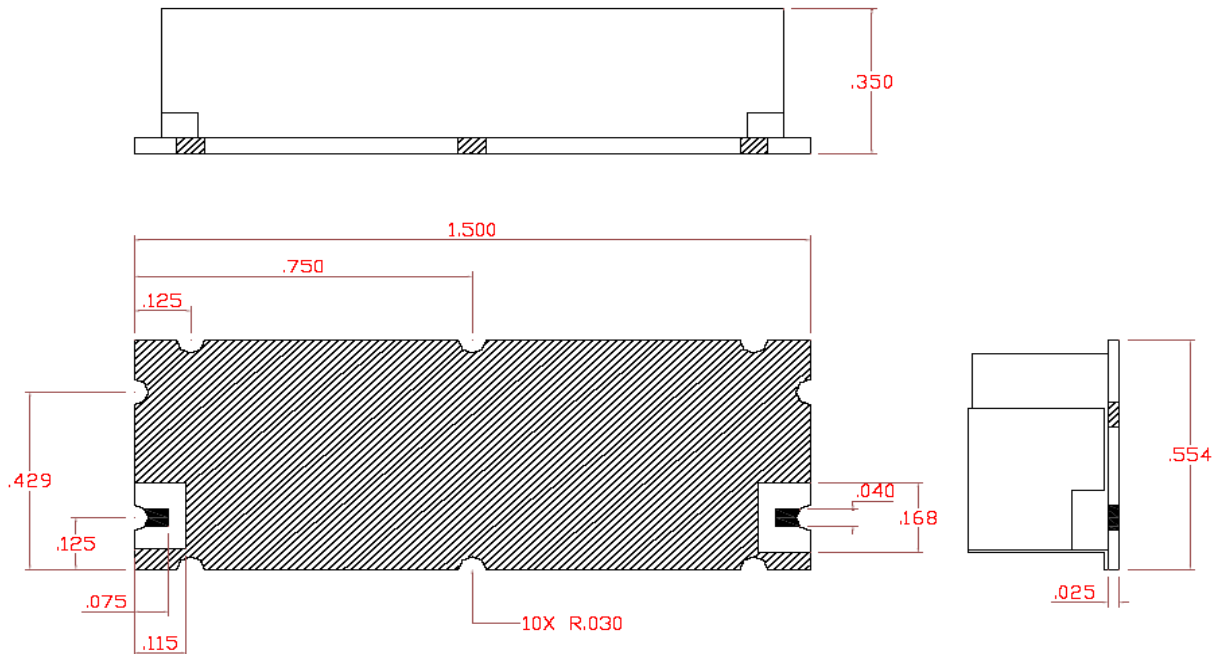

IN/OUT
 GROUND

UNIT : INCH
 TOLERANCE UNLESS
 OTH SPECIFIED : +/-0.03