


Electrical Specifications

No.	Parameter	Unit	Specification
1	Center Frequency	MHz	5250
2	Frequency Range	MHz	5150~5350
3	Insertion Loss in BW	dB	3.0 max
4	Ripple in BW	dB	1.0 max
5	Return Loss in BW	dB	10 min
6	Attenuation	dB	35 min @ 4100 MHz
			20 min @ 4800 MHz
			15 min @ 4875 MHz
			5 min @ 5625 MHz
7	Input Power	W	1W max
8	In / Out Impedance	Ohm	50
9	Operating Temp.	°C	-30 ~ +85
10	RoHS	-	Yes

Dimensions (unit: mm)



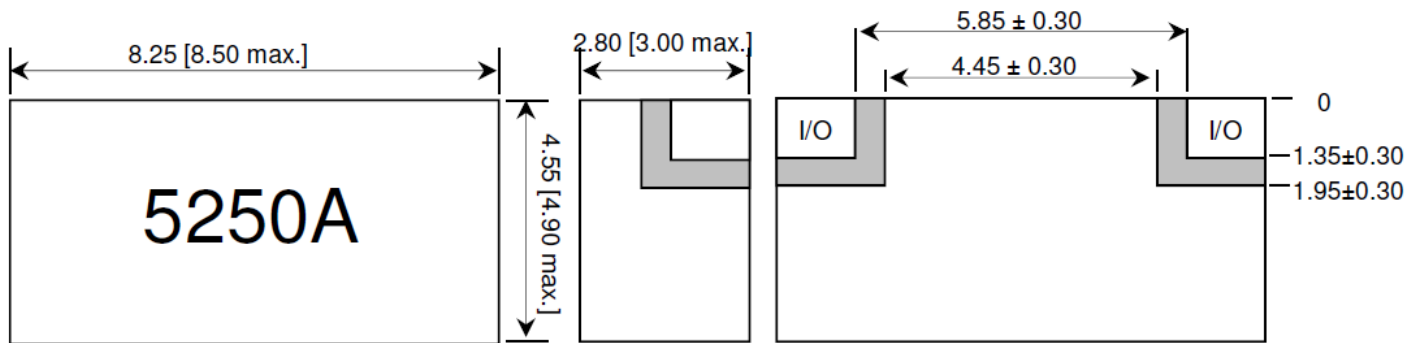

Plots

