

### Features

- Low Insertion Loss
- High Attenuation
- Compact Size
- Surface Mount


### Descriptions

Surface mount mono-block ceramic bandpass filter developed for UHF band applications.

### Electrical Specifications

Parameter	Unit	Specification
Center Frequency	MHz	625
Passband Frequency Range	MHz	562.5 ~ 687.5
Insertion Loss @Fc	dB	2.0 max
Return Loss (VSWR) in Passband	dB	12 min
Attenuation at Reject Band	dB	50 min @ DC ~ 437.5MHz
		50 min @ 812.5~ 4000MHz
Power Handling	Watt	3 max
In/Out Impedance	Ohm	50
Operating Temperature	°C	-40 ~ +70
Dimensions	mm	50.0 x 17.0 x 8 (L x W x H)
RoHS	-	Yes

### Mechanical Drawing

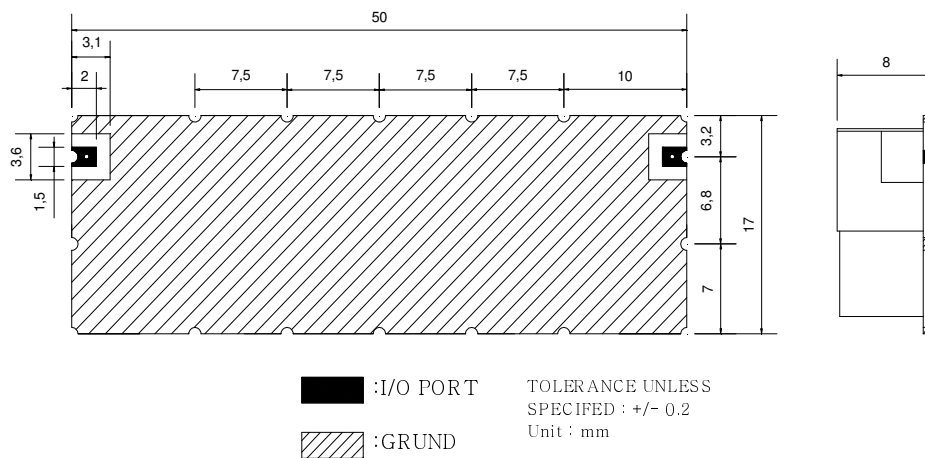

### Electrical Response

