




### Electrical Specifications


No.	Parameter	Unit	Specification
1	Center Frequency	MHz	1030
2	Frequency Range	MHz	1025~1035
3	Insertion Loss in BW	dB	3.0 max.
4	Ripple in BW	dB	1.0 max.
5	Return Loss in BW	dB	15 min.
6	Attenuation	dB	60 min. @ 910MHz
			65 min. @ 1150MHz
7	Input Power	W	1W max.
8	In / Out Impedance	Ohm	50
9	Operating Temp.	°C	-30 ~ +70
10	RoHS	-	Yes

### Dimensions (unit: mm)

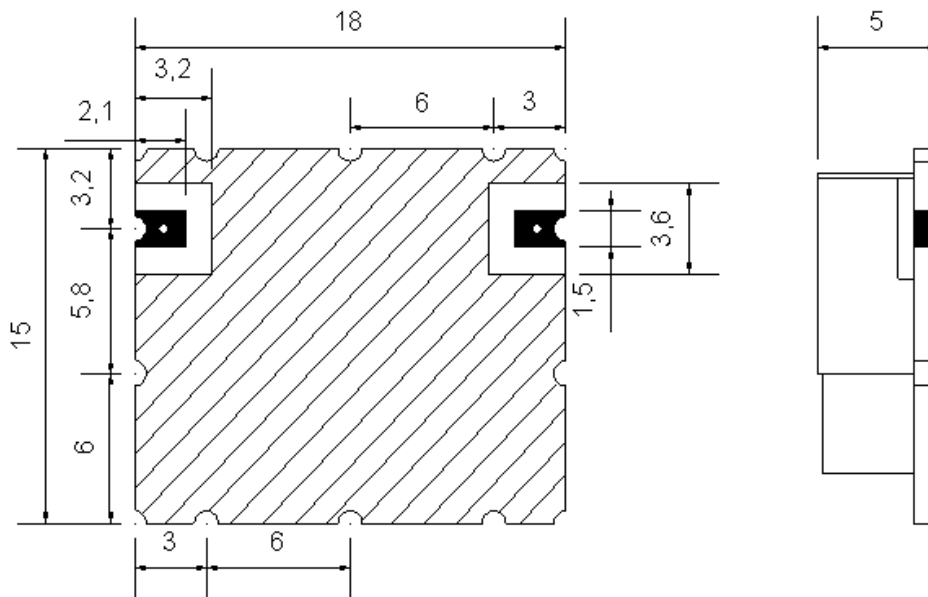

**:I/O PORT**

**TOLERANCE UNLESS  
SPECIFIED : +/- 0.2**



**:GRUND**

**Unit : mm**



### Simulation

