

## Features

- Low Insertion Loss
- High Attenuation
- Compact Size
- RF Pin Mount


## Descriptions

RF Pin mount LC bandpass filter developed for VHF band applications.

## Electrical Specifications

Parameter	Unit	Specification
Center Frequency (Fc)	MHz	240
3dB Passband Frequency Range	MHz	230 ~ 250
Insertion Loss @ Fc	dB	2.9 max
Return Loss(VSWR) @ Fc	dB	1.25:1 max
Attenuation	dB	45 min @ 200MHz
		45 min @ 280MHz
		50 min @ 197.5MHz
		50 min @ 282.5MHz
IN/OUT Impedance	Ohm	50
Operating Temperature	°C	-30 ~ +70
Dimensions (Excluding Connectors)	inch	1.0 x 0.38 x 0.38 (L x W x H)
RoHS	-	Yes

## Mechanical Drawing

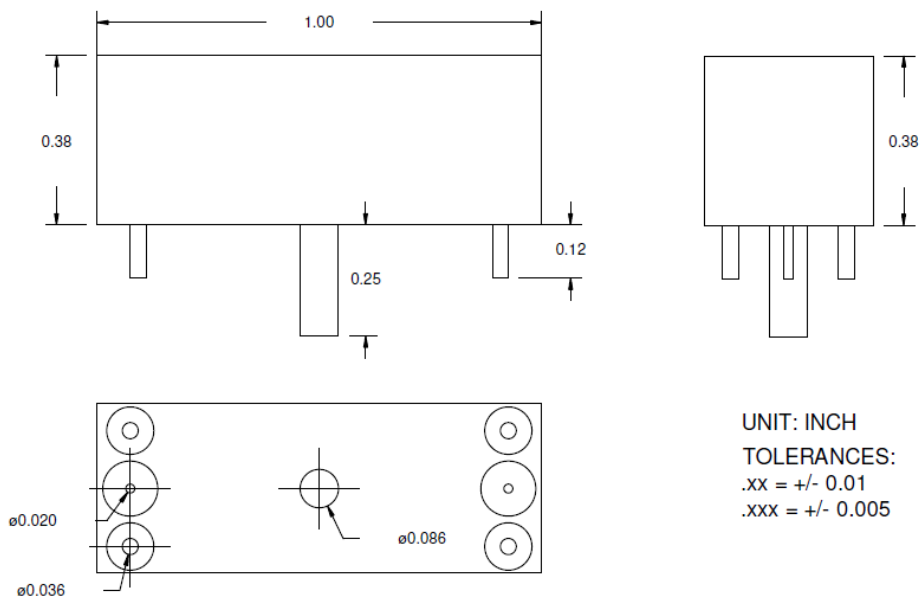

## Electrical Response

