


Electrical Specifications

Item	Parameter	Unit	Specification	
			Low(RX)	High(TX)
1	Center Frequency	MHz	1747.5	1842.5
2	Bandwidth	MHz	Fc±37.5 (1710~1785MHz)	Fc±37.5 (1805~1880MHz)
3	Insertion Loss in BW	dB	3.8 max	4.3 max
4	Passband Ripple	dB	2.0 max	2.2 max
5	Return Loss in BW	dB	10.0 min	10.0 min
6	Attenuation	dB	45min @ 1805~1880 MHz	45min @ 1710~1785 MHz
7	Input Power	Watt	3.0 max	
8	IN/OUT Impedance	Ω	50	
9	Operating Temp. Range	°C	-40 ~ +85	

Dimensions (unit: mm)

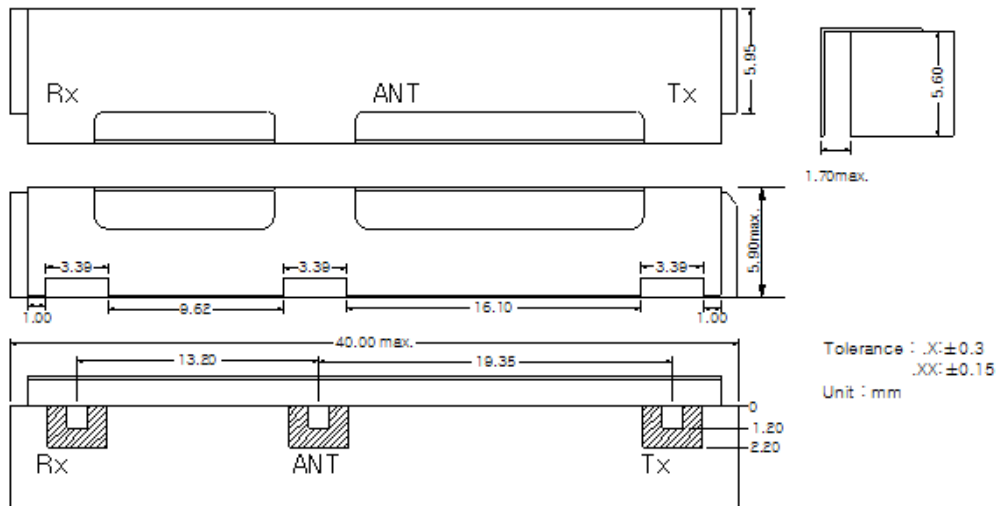


Plots

2003/02/22 Sat 10:32:38

