



Ceramic Monoblock Duplexer Specification

Customer:

Part No:


MDPX48R1880/1960S60B

Date:


1. Properties:

No.	Characteristics	Unit	Tx→ANT	ANT→Rx
1	Center Frequency (F ₀)	MHz	1880	1960
2	Band Width	MHz	F ₀ +/- 30	F ₀ +/- 30
3	Insertion Loss at BW (max.)	dB	3.0	3.5
4	Ripple at BW (max.)	dB	2.0	2.5
5	V.S.W.R	dB	1.8	2
6	Attenuation (Absolute Value.)	dB	30 min. at Rx Band 1930 ~1990 MHz	35 min. at Tx Band 1850 ~ 1910 MHz
7	In/Out Impedance	Ohm	50	50

2. Performance:

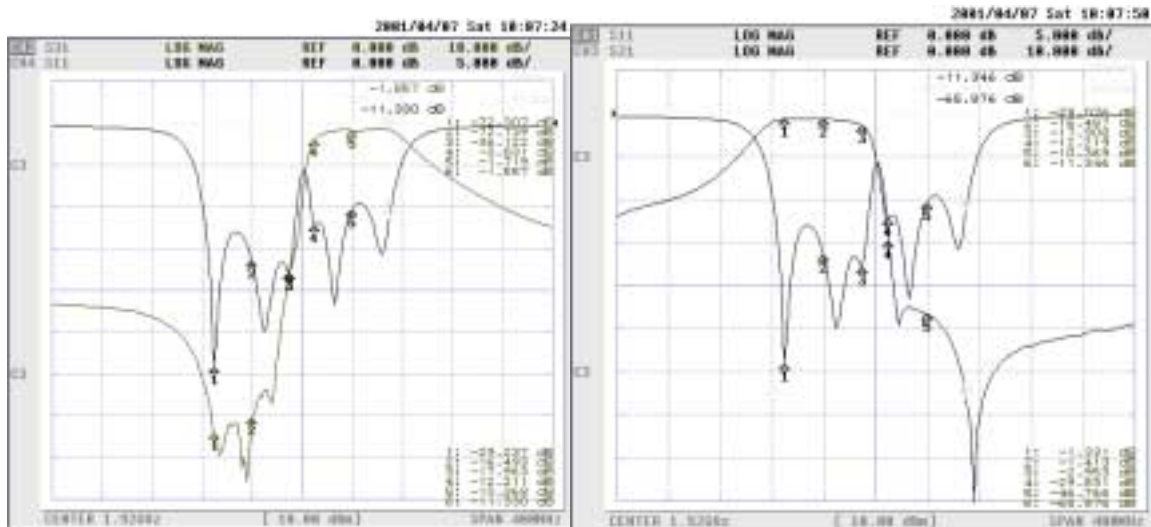

3. Dimensions

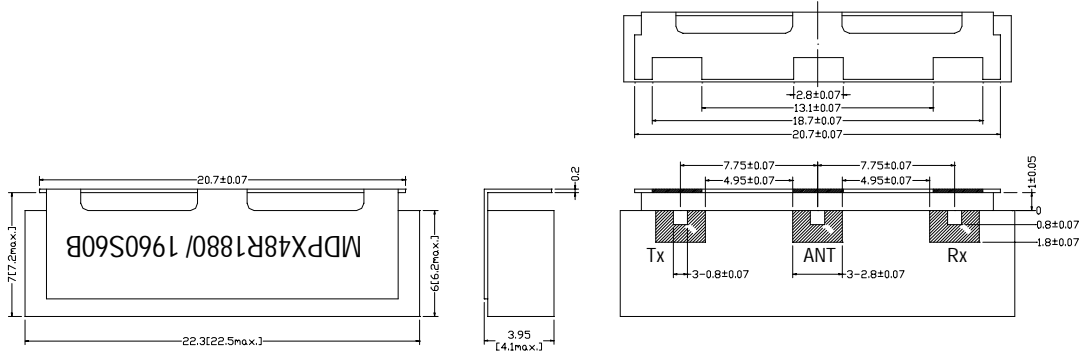

Tolerance Unless
 Otherwise Specified: ± 0.15
 Unit: mm