

## Features

- Low Insertion Loss
- Small Footprint
- Surface Mount
- LTE Ceramic Duplexer


## Descriptions

Surface mount, Silver (Ag) coated, ceramic duplexer, developed for LTE applications. Filter is composed of a ceramic block plated with Ag and a shield made of nickel silver plated steel.


## Electrical Specifications

Parameter	Unit	Specification	
		Low (TX)	High (RX)
Center Frequency	MHz	2050	2250
Band Width	MHz	100 (2000~2100)	100 (2200~2300)
Insertion Loss in BW	dB	1.0 max	1.0 max
Ripple in BW	dB	0.5 max	0.5 max
Return Loss	dB	14	14
Attenuation	dB	41 min @ 2200 ~ 2300 MHz	43 min @ 2000~2100MHz
Input Power	Watt	2 max (CW)	2 max (CW)
IN/OUT Impedance	Ω	50	
Operating Temp. Range	°C	0 ~ +50	
RoHS	-	Yes	
Dimensions	mm	27.8 x 8.8 x 6.2 (L x W x H)	

## Mechanical Drawing

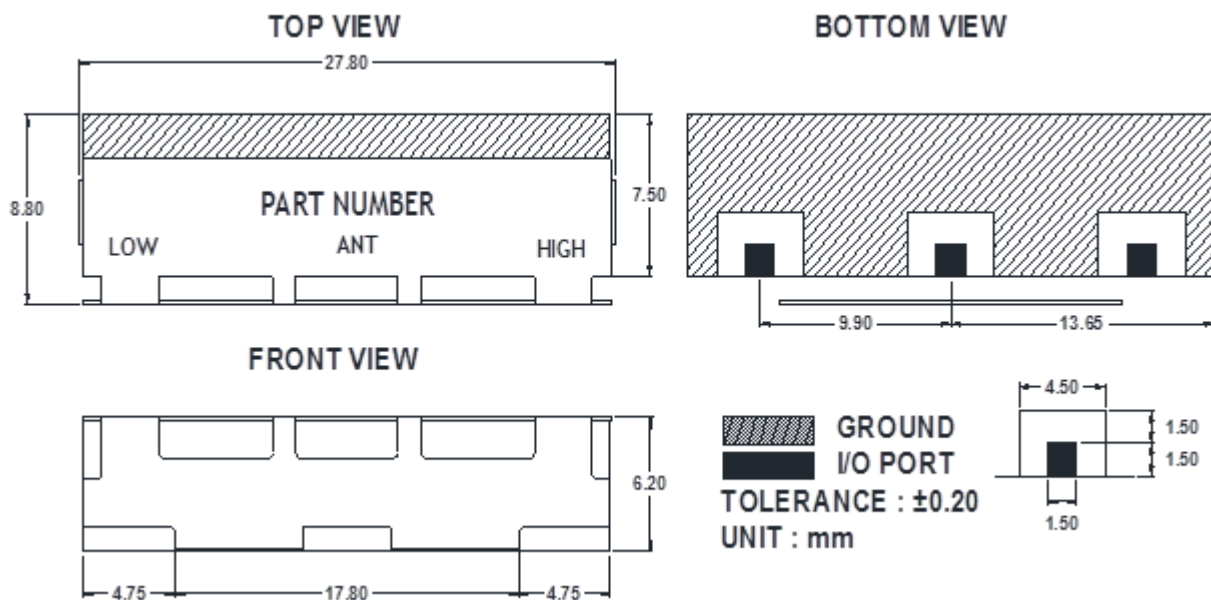

## Recommended PCB Layout

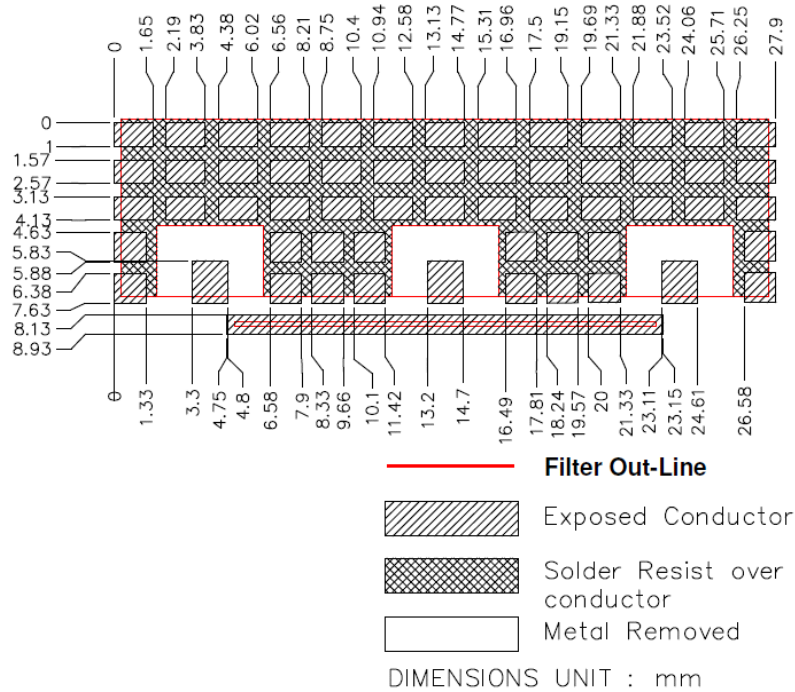

## Electrical Response

