

Features

- Low Loss
- Low Ripple
- High Rejection

Description

Surface mount, silver (Ag) coated ceramic filter for use in broadband applications.



Weight: 7.8 grams typical.

Material: Filter is composed of a ceramic block plated with Ag.

Filter complies with RoHS standards.

Electrical Specifications


Parameter	Frequency MHz	Typical @ 25°C	Specification @ 25°C	Spec over -40°C to +70°C
Low Band Response (S12)				
Passband Iloss	3420 - 3450	-2.00	-3.60	-4.00
Passband Ripple	3420 - 3450	0.24	0.80	1.00
Passband Return Loss @ Port 1	3420 - 3450	-17.90	-14.00	-14.00
Passband Return Loss @ Port 2	3420 - 3450	-17.90	-14.00	-14.00
Attenuation	0.1 - 2500	-60.00	-35.00	-35.00
	2788 - 2818	-56.40	-45.00	-45.00
	3104 - 3134	-49.70	-40.00	-40.00
	3365	-19.40	-15.00	-15.00
	3520 - 3550	-60.00	-50.00	-50.00
	4000 - 4500	-38.00	-35.00	-35.00
	4500 - 5000	-28.20	-20.00	-20.00
High Band Response (S31)				
Passband Iloss	3520 - 3550	-2.00	-3.60	-4.00
Passband Ripple	3520 - 3550	0.25	0.80	1.00
Passband Return Loss @ Port 1	3520 - 3550	-16.40	-14.00	-14.00
Passband Return Loss @ Port 3	3520 - 3550	-16.40	-14.00	-14.00
Attenuation	0.1 - 2500	-47.50	-35.00	-35.00
	2828 - 2858	-42.50	-40.00	-40.00
	3347 - 3377	-57.90	-35.00	-35.00
	3420 - 3450	-53.90	-50.00	-50.00
	4000 - 4500	-36.70	-35.00	-35.00
	4500 - 5000	-24.10	-20.00	-20.00
Isolation (S23)				
Rejection @ Low Band	3420 - 3450	-53.20	-50.00	-50.00
Rejection @ High Band	3520 - 3550	-60.00	-50.00	-50.00
Power into any port		2 Watt max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification	Allowance
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB


*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726; US 4,742,562; US 4,800,348; US 4,829,274; US 5,146,193; EP 0573597; DE 0573597; FR 0573597; JP 508149/92; KR 142171; US 5,162,760; US 5,218,329; US 5,250,916; US 5,327,109; US 5,488,335; CA 2114029; FR 9306297; GB 2273393; JP 3205337; KR 115113; CN 93106228.4; US 5,512,866; EP 0706719; DE 0706719; FR 0706719; GB 0706719; CN 95190359.4; US 5,602,518; US 5,721,520; US 5,745,018; EP 0910875; DE 0910875; DK 0910875; FR 0910875; GB 0910875; IE 0910875; JP 505182/98; KR 10-323013; US 5,994,978; US 6,462,629; CN 00810420.4; US 6,559,735; US 6,650,202; US 6,834,429. Other US and foreign patents pending.

Mechanical Drawing

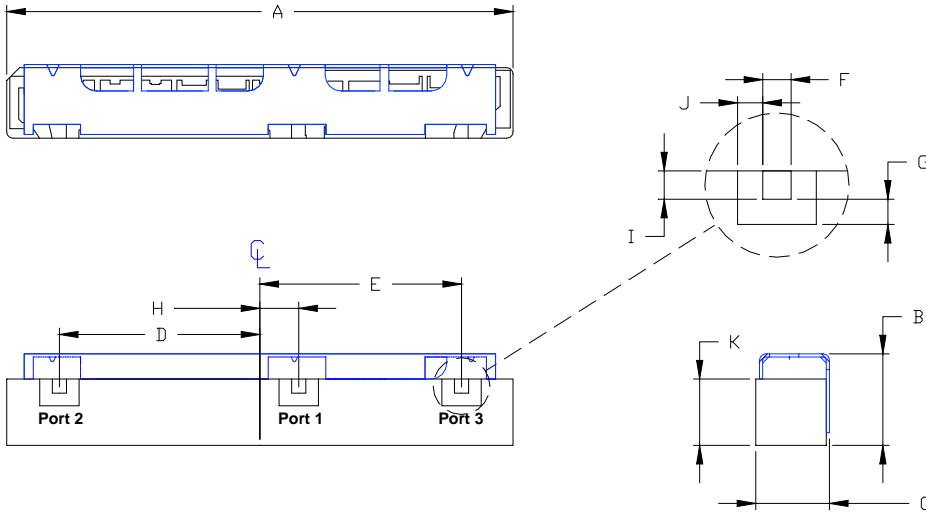


Dim	Nominal (mm)	Tolerance (mm) +/- or max
A	41.33	Max.
B	7.8	Max.
C	6.3	Max.
D	16.17	0.13
E	16.27	0.13
F	1.14	0.13
G	1.02	0.13
H	3.14	0.13
I	1.14	0.13
J	1.02	0.13
K	5.63	Max.

PCB Layout

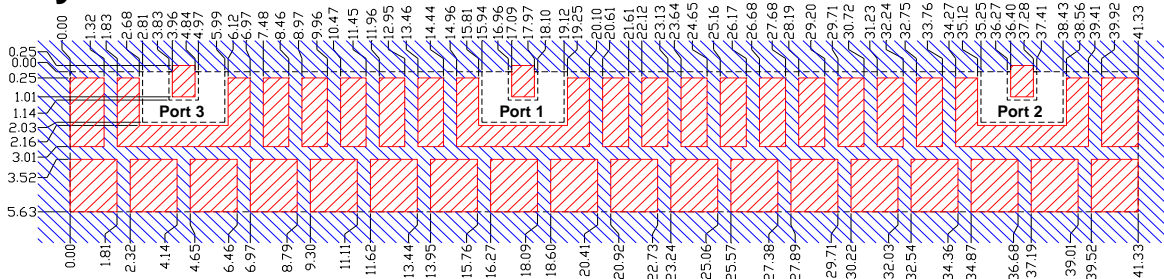


- Filter Outline
- Exposed Conductor
- Solder Resist Over Conductor
- Solder Resist Over Dielectric

Electrical response

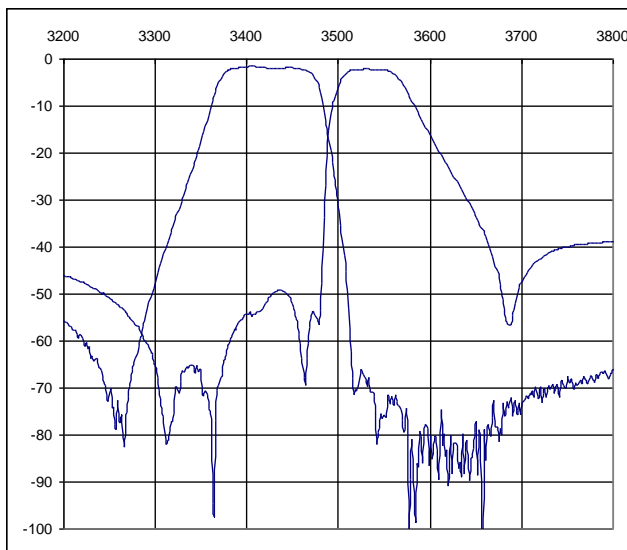

Packaging and Marking

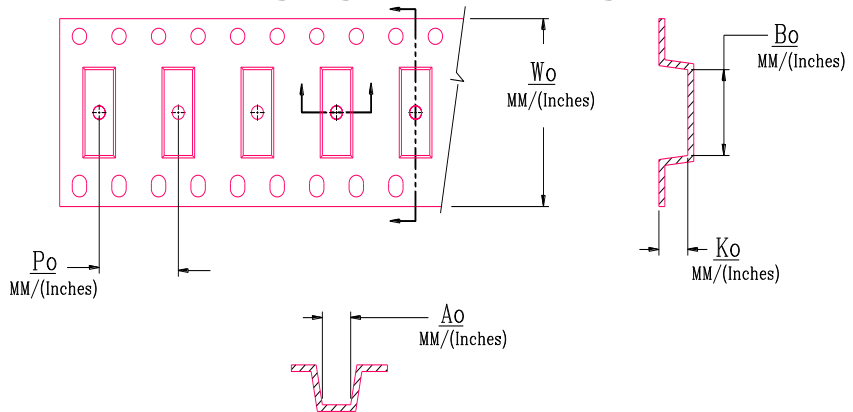

W_o	A_o	B_o	K_o	P_o
56.0/(2.205)	8.10/(0.319)	41.65/(1.640)	6.5/(0.256)	16.0/(0.630)