


<b>Customer:</b>	<b>Date:</b> 08-11-16	<b>Part No.</b> DPM1232-1567-67A1
------------------	-----------------------	-----------------------------------

## Electrical Specifications

No.	Parameter	Unit	Specifications	
			Low Path	High Path
1	Center Frequency	MHz	1232	1567
2	Bandwidth	MHz	$F_c \pm 33.5$ min. (1198.5~1265.5MHz)	$F_c \pm 33.5$ min.(1533.5~1600.5MHz)
3	Insertion Loss in BW	dB	0.6 max.	0.6 max.
4	Ripple in BW	dB	0.3 max.	0.3 max.
5	Return Loss in BW	dB	15 min.	
6	Attenuation	dB	10 min. @ DC ~ 1065MHz	10min. @ DC ~ 1065MHz
			10 min. @ 1400 ~ 1425MHz	10 min. @ 1400 ~ 1425MHz
			25 min. @1499 ~ 1635MHz	25 min. @1164 ~ 1300MHz
			15 min. @ 1710 ~ 2500MHz	15 min. @ 1710 ~ 2500MHz
7	Input Power	Watt	3 max.	
8	IN/OUT Impedance	$\Omega$	50	
9	Operating Temp. Range	$^{\circ}\text{C}$	-40 ~ +85	

## Dimensions [Unit: mm]

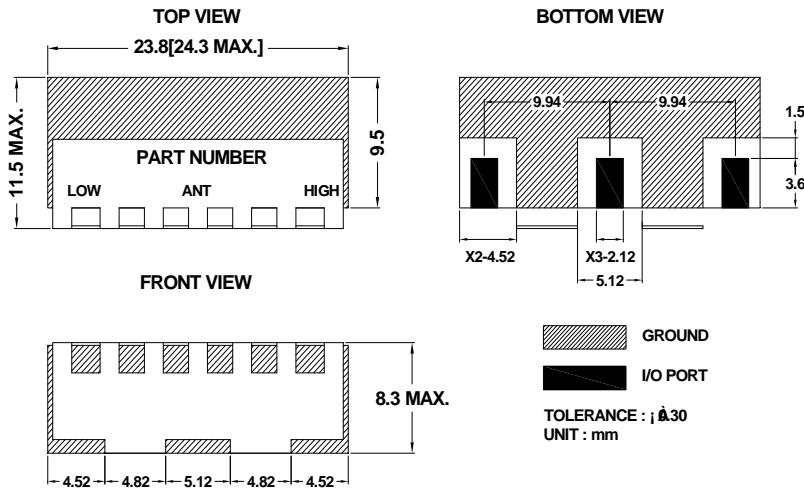

## Simulation Graphs

