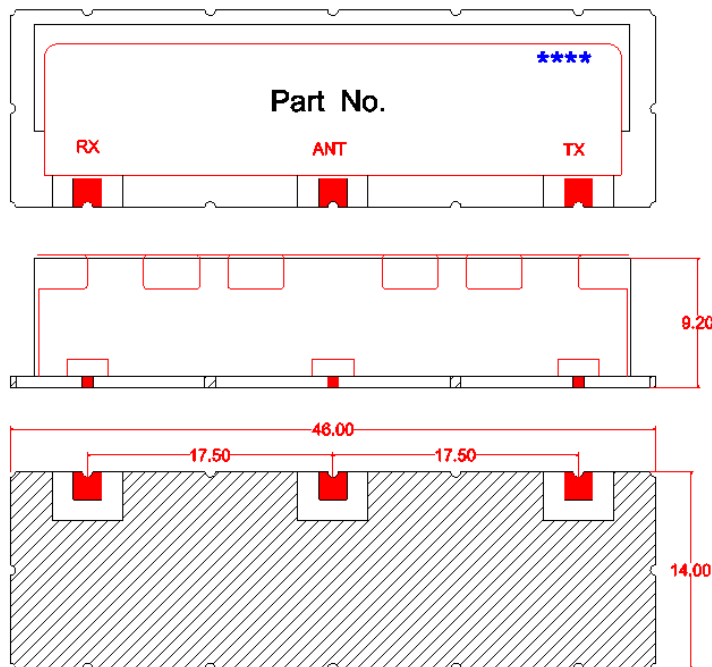


**Electrical Specifications**

Item	Parameter	Unit	Specification	
			Low (RX)	High (TX)
1	Center Frequency	MHz	707	737
2	Frequency Range	MHz	698 ~ 716	728 ~ 746
3	Insertion Loss in BW	dB	2.5 max	2.5 max
4	Passband Ripple	dB	2.0 max	2.0 max
5	Return Loss in BW	dB	15 min	15 min
6	Attenuation	dB	50 min @ 728 ~ 746MHz	50 min @ 698 ~ 716MHz
7	Input Power	Watts	3 max	
8	IN/OUT Impedance	$\Omega$	50	
9	Operating Temp. Range	$^{\circ}\text{C}$	-40 ~ +85	

**Dimensions (unit: mm)**

**Notes:**

1. Surface mount package
2. Max reflow temperature 230  $^{\circ}\text{C}$  for 10 Sec.
3. Tolerance unless specified +/- 0.3
4. \*\*\*\*—Date code

