


Monolithic Block Duplexer Preliminary Specification

Part No: DPM902-947-25A1
 Date: 11/4/2003

1. Properties:

No.	Characteristics	Unit	Tx → ANT	ANT → Rx
1	Center Frequency (F_0)	MHz	902	947
2	Bandwidth	MHz	25.0	25.0
3	Insertion Loss in BW (max.)	dB	2.3	3.2
4	Ripple in BW (max.)	dB	1.2	1.5
5	VSWR		1.8	1.8
6	Attenuation (Absolute Value)	dB	30 min. @ Rx	30 min. @ Tx
7	In/Out Impedance	Ohm	50	50
8	Operating Temp. Range	°C	-30 ~ +80	

2. Dimension:

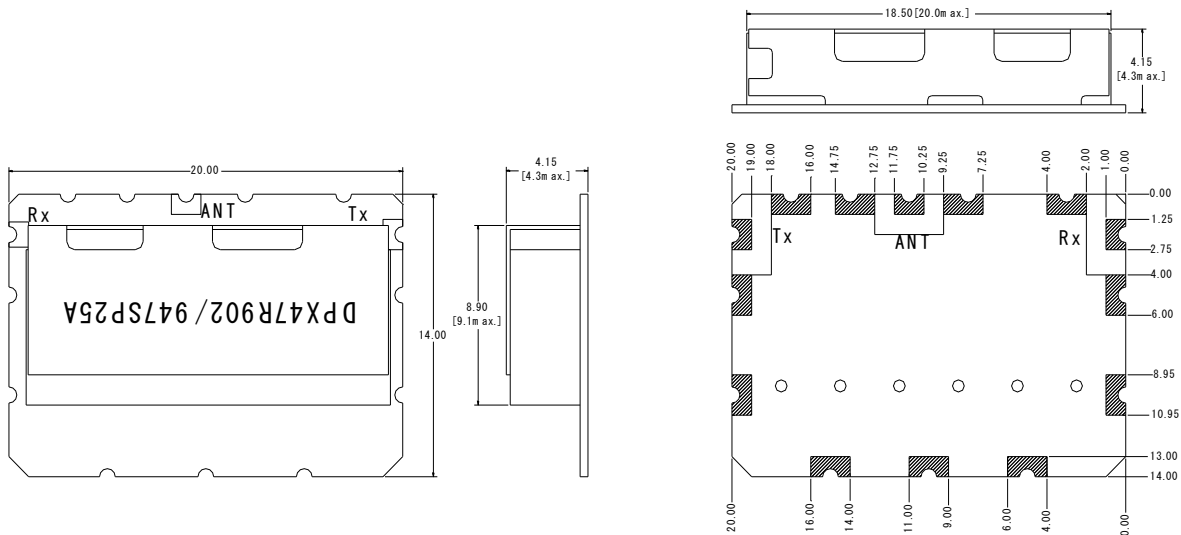

Tolerance Unless Otherwise specified : ±0.2
 Dimension : mm