


Electrical Specification

Item	Parameter	Unit	Specification
1	Reject Band Center Frequency	MHz	1175/1585
2	Passband Frequency Range	MHz	500 ~ 1100
			1250 ~ 1520
			1650 ~ 2000
3	Insertion Loss in Passband	dB	0.4 max
4	Return Loss (VSWR) in Passband	dB	1.5:1 max
5	Attenuation in Reject band	dB	50 @ 1163 MHz
			50 @ 1189 MHz
			50 @ 1559 MHz
			50 @ 1610 MHz
6	Power Handling	Watts	500W @ Passband
			10W @Reject band
7	In/Out Impedance	Ohm	50
8	Connectors	-	N-Female
9	Dimensions	inch	12.50 x 3.58 x 2.50 (L x W x H)

Dimensions (Unit: inch)

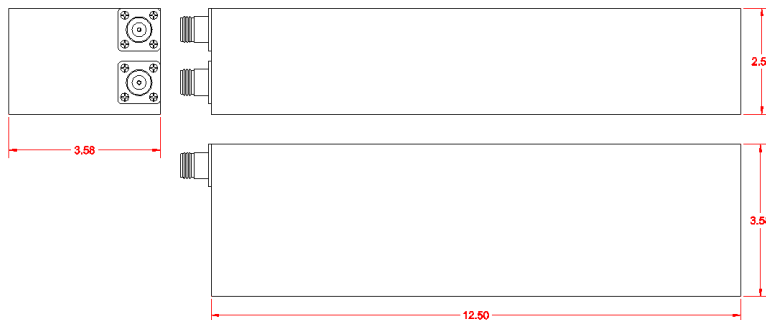

Simulations

