


Product Specification

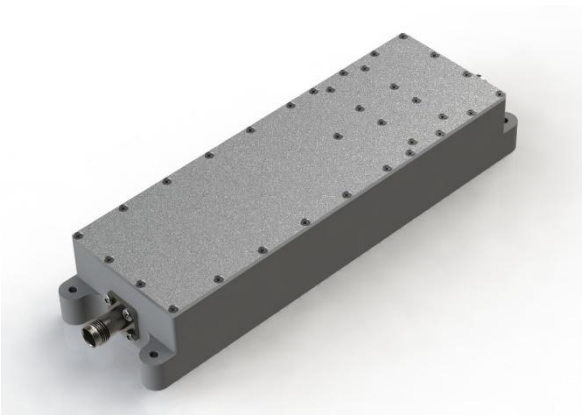

CCDP-924 GPS L1/L2 Filter Assembly

Electrical Specifications

PASSBAND	
L1 Channel	1560.42 – 1590.42 MHz
L2 Channel	1212.60 – 1242.60 MHz
PASSBAND INSERTION LOSS	1.0 dB Max.
PASSBAND RETURN LOSS	18 dB Min.
REJECTION	80 dB @ DC to 70 dB @ 1127 MHz 70 dB @ 1127 MHz to 0 dB @ 1203 MHz 0 dB @ 1251 MHz to 70 dB @ 1327 MHz 70 dB @ 1327 MHz to 70 dB @ 1475 MHz 70 dB @ 1475 MHz to 0 dB @ 1552 MHz 0 dB @ 1596.5 MHz to 70 dB @ 1675 MHz 70 dB @ 1675 MHz to 80 dB @ 3500 MHz


Environmental Specifications

OPERATING TEMPERATURE	-40° to +71°C Operating
HUMIDITY	95%

Product Specification

Mechanical Specifications

CONNECTORS	TNC Female, Weatherized
SIZE	See Outline below
WEIGHT	T.B.D.

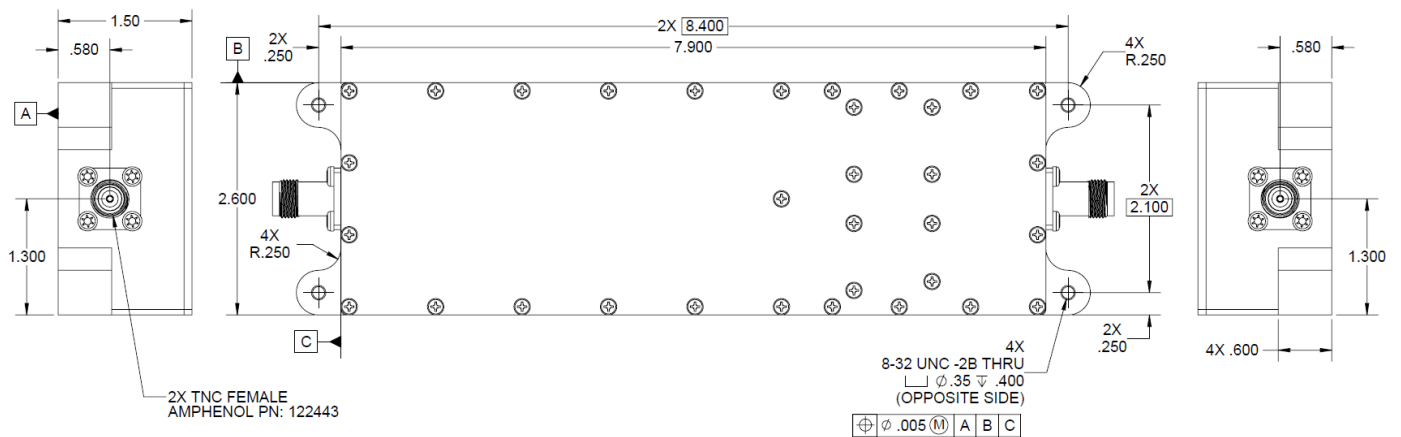

OUTLINE DRAWING