

## Features

- Compact Size
- High Attenuation
- SMA connector
- LC Low Pass Filter


## Descriptions

LC Low Pass Filter developed for HF applications. It is shielded with a metal cover.

## Electrical Specifications

Parameter	Unit	Specification
Cutoff Frequency Fc	MHz	15.4
Insertion Loss	dB	1.0 max @ 13.5 MHz
Return Loss (VSWR)	dB	1.5:1
Attenuation	dB	60 min @ 20MHz
IN/OUT Impedance	$\Omega$	50
Operating Temp. Range	$^{\circ}\text{C}$	-55 ~ +85
Dimensions	inch	2.0 L x 0.55 W x 0.4H

## Mechanical Drawing

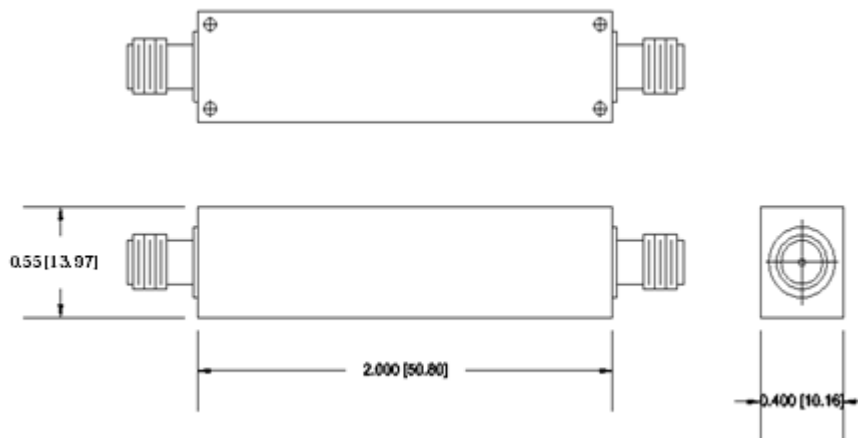

## Electrical Response

