

### Features

- Low Insertion Loss
- High Attenuation
- Compact Size
- SMA Connectors


### Descriptions

SMA lumped element lowpass filter developed for UHF band applications.

### Electrical Specifications:

Parameter	Unit	Specification
Passband Frequency Range	MHz	DC – 350 MHz
Insertion Loss	dB	1.0 max
Return Loss	dB	15.0 min
Rejection bands	dB	70 min @ 450 - 4000 MHz
In / Out Impedance	Ohms	50
Power	dBm	30
Operating Temperature Range	°C	23 ± 20 °C
Dimensions	inches	1.75 x 0.44 x 0.40 (L x W x H)

### Mechanical Drawing:

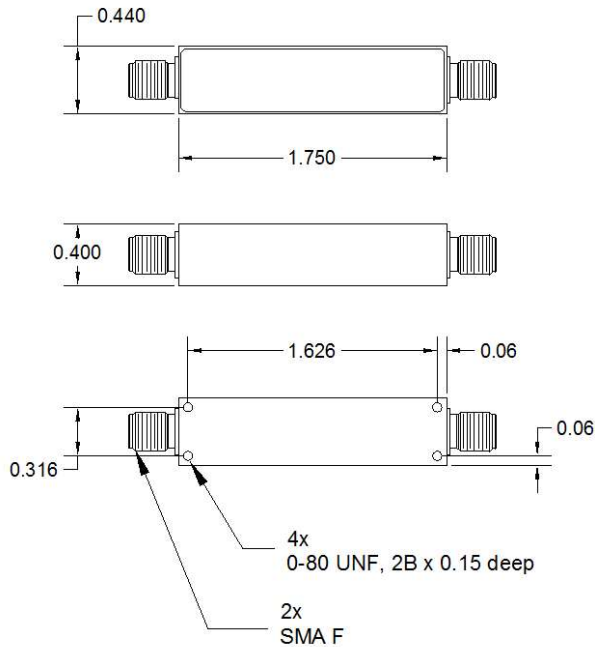

## Electrical Response:

