



Specification

LC Lowpass Filter


Design	Engineering	Approval
CYK	MHJ	ECL

Customer:	Date: 07-24-12	P/N: LPL800B1
------------------	-----------------------	----------------------

Electrical Specifications

No.	Parameter	Unit	Specifications
1	Cut off Frequency	MHz	800
2	Bandwidth	MHz	600 ~ 800
3	Insertion Loss in BW	dB	1.25 max.
4	Return Loss in BW	dB	14.0 min.
5	Attenuation	dB	60 min. @ 1200MHz
6	Input Power	Watt	5 max.
7	IN/OUT Impedance	Ω	50
8	Operating Temp. Range	$^{\circ}\text{C}$	-40 ~ +85

Dimensions [Unit: mm]

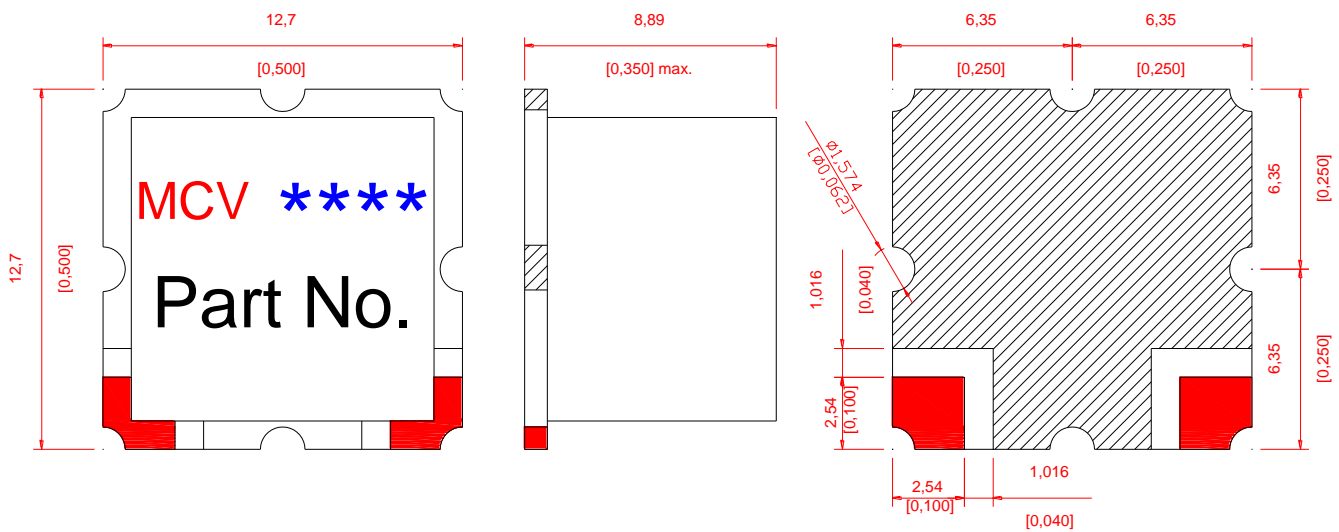

Notes :

- Surface mount package
- Dimensions in millimeters
- Max reflow temperature 230 $^{\circ}\text{C}$ for 10 sec
- If boards are cleaned after installation units must be completely dried
- Tolerance unless specified : ± 0.3
- **** -> Date code(YYWW)

- : In / Out Port
- : G round
- : No metal



Simulation Graph

