

## Features

- Low Insertion Loss
- High Rejection
- High Q
- SMA Connectors


## Descriptions

SMA connector high selectivity cavity notch filter developed for UHF&L band applications

## Electrical Specifications

Parameter	Unit	Specification
Reject Band Center Frequency (Fc)	MHz	793
Passband Frequency Range	MHz	DC ~ 786
		800 ~ 2230
Insertion Loss in Passband	dB	2.25 max
Return Loss in Passband	dB	14.0 min
Attenuation at Reject Band	dB	60 min @ 788 ~ 798MHz
In/Out Impedance	Ohm	50
Operating Input Power	Watts	10 CW max
Dimensions	Inch	12.95 x 4.44 x 3.36 (L x W x H)
Connectors	-	SMA(F)-Type

## Mechanical Drawing

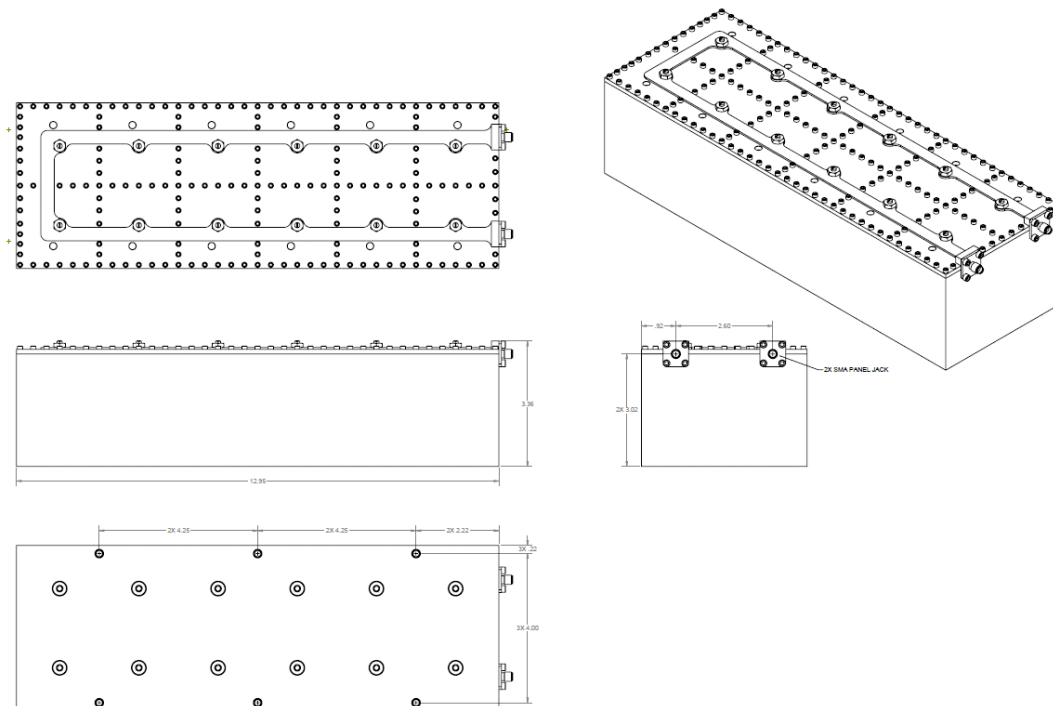

## Electrical Response

