


Product Specifications

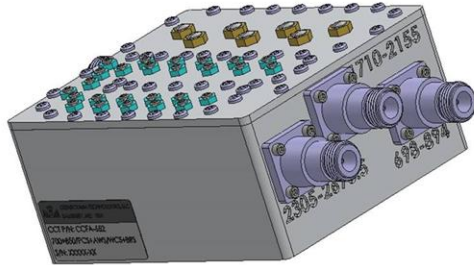

CCFA-652-1

Multiband Combiner (Triplexer)

**Covers 700-850, 1900-AWS Extended
and WCS-BRS**

Low Insertion Loss

Low PIM Device, -153 dBc

Stackable

Electrical Specifications

PASSBAND

COMMON PORT	698 - 2690 MHz
700 - 800 - 850 BAND PORT	698 - 894 MHz
1900 - AWS (EXT) BAND PORT	1695 - 2180 MHz
WCS - BRS BAND PORT	2305 - 2690 MHz

PASSBAND INSERTION LOSS 0.5 dB Max.

PASSBAND RETURN LOSS 20 dB Min.

PORT TO PORT ISOLATION 20 dB Min.

PASSIVE INTERMODS -153 dBc.

POWER HANDLING 50 W CW / Avg. Per Port
500 W Peak

Environmental Specifications

OPERATING TEMPERATURE -40° to +60°C Operating

ENVIRONMENTAL Per ETS-300

WEATHERIZATION Per IP-65

Product Specifications



Mechanical Specifications

CONNECTORS

7/16 DIN Female (Long Neck)

SIZE


5.2 x 4.3 x 2.6"

WEIGHT

Approx. 8 lbs.

AVAILABLE OPTIONS

- Connectors, 7/16 DIN, 4.3/10.0 Mini DIN or Type 'N'
- Mounting: Wall Mount, Tower, Cable Tray, Stacking, 2x, 3x Ladder or Rack Mount Options Available

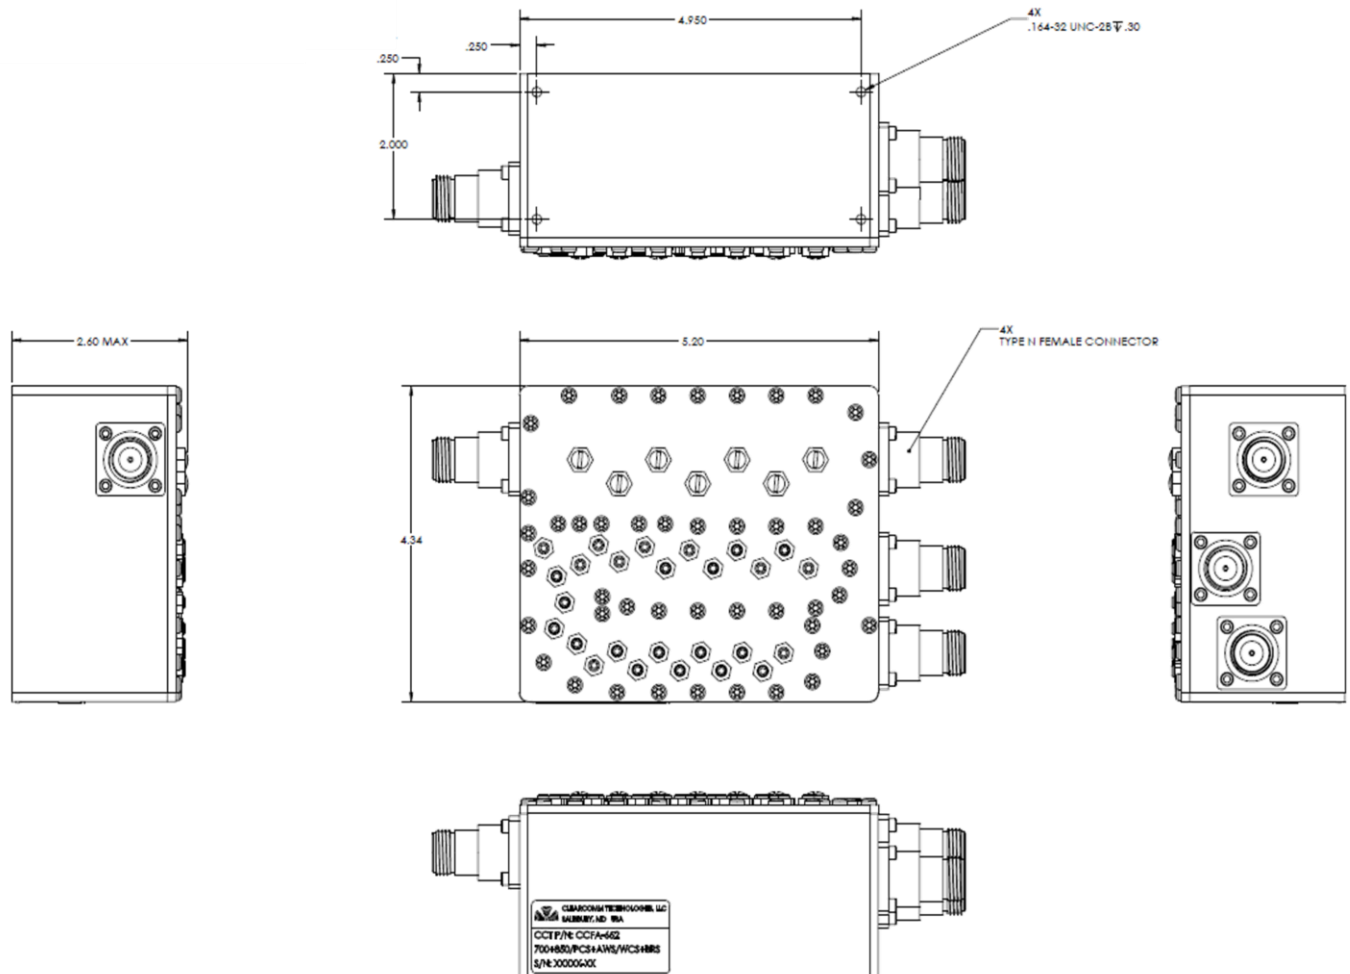

OUTLINE DRAWING

MCV Microwave
Tel: +1(302)877-8079
Web: www.mcv-microwave.com

MCV Microwave
Clearly the Choice!

11307 Trussum Pond Road
Laurel, DE 19956
[Mailto: sales@mcv-microwave.com](mailto:sales@mcv-microwave.com)