

Features

- Low Insertion Loss
- High Attenuation
- Ultimate Rejection
- Small Footprint
- High Ultimate Rejection


Descriptions

Surface mount ceramic bandpass filter developed for L2-band applications. Filter is composed of silver plated ceramic block with metal cover.

Electrical Specifications

Parameter	Unit	Specification
Center Frequency	MHz	1227.6
Passband Frequency Range	MHz	1217.6 ~ 1237.6
Insertion Loss in Passband	dB	1.2 max
Ripple in Passband	dB	0.5 max
Return Loss (VSWR) in Passband	dB	14 min
Attenuation	dB	30 min @ $F_c \pm 100$ MHz
		20 min up to 20GHz
In/Out Impedance	Ohm	50
Input Average Power	W	3 max
Operating Temperature Range	°C	-30 ~ +85
ROHS	-	Yes
Dimensions	mm	28 x 15.5 x 10.5 (L x W x H) max

Mechanical Drawing

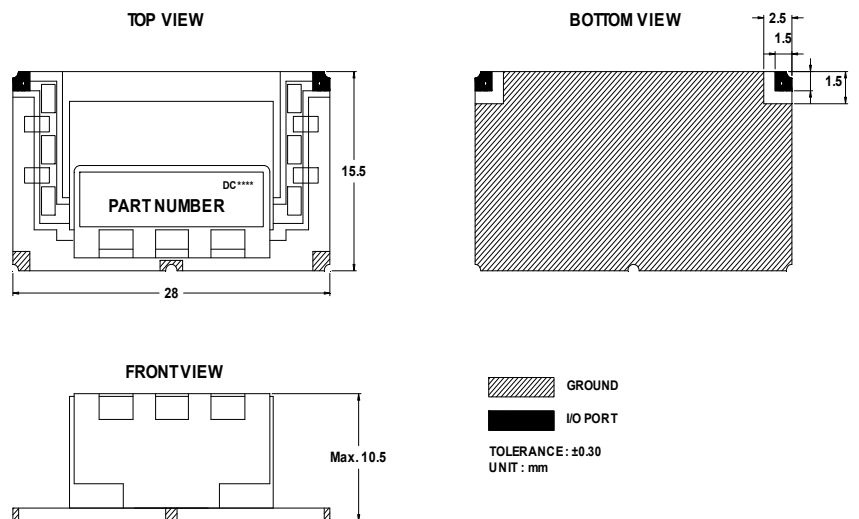

Mechanical Drawing

