

Features

- Low Insertion Loss
- High Attenuation
- Compact Size
- Surface Mount


Descriptions

Surface mount ceramic duplexer developed for LTE band-28B applications.

Electrical Specifications

Parameter	Unit	Specification	
		LOW	HIGH
Center Frequency	MHz	733	788
Passband Frequency Range	MHz	30 (718~748)	30 (773~803)
Insertion Loss in Passband	dB	2.0 max	2.0 max
Ripple in Passband	dB	1.0 max	1.0 max
Return Loss (VSWR) in Passband	dB	15 min	15 min
Attenuation at Reject Band	dB	60 min @773 ~ 803 MHz	60 min @718 ~ 748 MHz
Power Handling	Watt	3 max	
In/Out Impedance	Ohm	50	
Operating Temperature	°C	-45 ~ +85	
Dimensions (max)	mm	42.5 x 20.5 x 9.5 (L x W x H)	

Mechanical Drawing

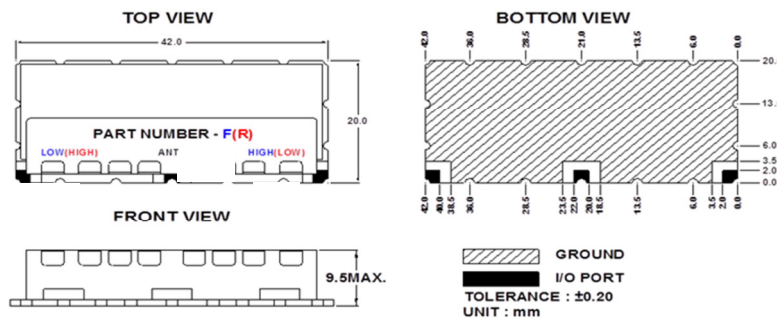

Footprint

